


Findings:

- ✓ Walk/bike access to school is along the student parking lot driveway (northern most access point)
- ✓ Nearly all walkers observed coming from/going to the south/west
- ✓ Many walkers already using other more convenient routes without sidewalks (main school driveway, bus loop)
- ✓ Safety concerns & significant conflicts at the main school driveway in the PM

Recommendations:

- ✓ Construct new sidewalk connection to front of school from Excalibur Rd at bus loop driveway



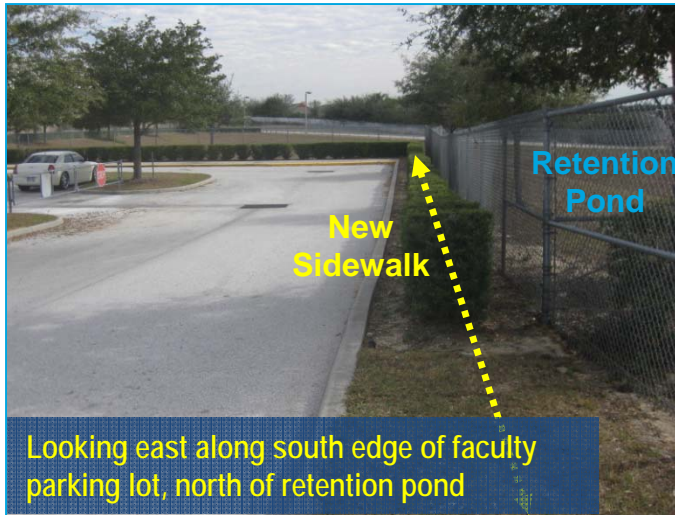

Issues:

- ✓ Only 5 feet of space available between back of curb & existing fence along north side of retention pond (6 feet is minimum sidewalk width at back of curb); would require fence to be moved towards the retention pond & existing hedge to be removed
- ✓ Would require new gate to be cut in fence along south side of faculty parking lot for sidewalk access
- ✓ Sidewalk alignment would still require walkers to cross the bus access driveway at Excalibur Rd (although no conflicts observed at this location)

