



3911 W Newberry Road  
Gainesville, Florida 32607

p: 352.363.6070  
f: 352.363.6071

scorpioco.com

# Submittal

**JOB NAME:** Lake County Fire Station Wind Mitigation **DATE:** 12/22/2025

**OWNER/ARCHITECT JOB#:** 25-923 **SCORPIO JOB #:** 25061

**SPEC SECTION:** Joint Sealants **SPEC NUMBER:** 07 92 00 **REV:** 0

**SUBCONTRACTOR/VENDOR:** General Caulking and Coatings Company

**SUPPLIER:** See Submittal

CONTRACTOR COMMENTS:	CONTRACTOR'S STAMP:
Joint sealants product data sheets and color chart.	<div style="border: 2px solid black; padding: 10px;"> <p style="text-align: center;"><b>SHOP DRAWINGS / SUBMITTAL REVIEW</b></p> <p style="font-size: 8px;">SUBMITTAL WAS REVIEWED FOR DESIGN AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE SUBMITTING CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT THE JOB SITE FOR TOLERANCES, CLEARANCES, QUANTITIES, FABRICATION PROCESS AND TECHNIQUE OF CONSTRUCTION, COORDINATION OF HIS WORK WITH OTHER TRADES AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.</p> <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="font-size: 10px;"> <p><b>Scorpio.</b></p> <p>3911 W. University Ave. Gainesville, FL 32607 f: 352.363.6070</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"><input checked="" type="checkbox"/> REVIEWED</div> <div style="text-align: center;"><input type="checkbox"/> REVIEWED W/ CHANGES</div> <div style="text-align: center;"><input type="checkbox"/> REVISE AND RESUBMIT</div> <div style="text-align: center;"><input type="checkbox"/> REJECTED</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <p>BY Ana Palm</p> <p>DATE 12/22/25</p> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <p>SUBMITTAL# 8</p> <p>SPEC 07 92 00</p> </div> </div>
ARCHITECT COMMENTS:	ARCHITECT'S STAMP:
Color to selected by owner on a per-building basis. This product to also be used where existing sealant is to be reapplied per the drawings.	<div style="border: 1px solid red; padding: 5px;"> <p style="font-size: 8px; color: red;"> <input type="checkbox"/> Reviewed – No Comments  <input checked="" type="checkbox"/> Reviewed – See Comments  <input type="checkbox"/> Revise and Resubmit  <input type="checkbox"/> Rejected – Re-Submittal Required         </p> <p style="font-size: 8px; color: red;">           This review is only for general conformance with the design concept of the project and general compliance with the information give in the Contract Documents. Quantities and exact dimensions are the responsibility of the contractor and/or subcontractor. This review does not affect the requirements of any contract, nor imply any approval of construction methods and/or safety requirements. This review does not authorize a change in contract value.         </p> <p style="font-size: 8px;">           Forefront Architecture &amp; Engineering, LLC            FL License No. AR102538            FL License No. CA30900            Signature:             Date: 1/7/26            Project: 25-10518 Fire Station Hazard Mitigation         </p> </div>
ENGINEER COMMENTS:	ENGINEER'S STAMP:



**General Caulking  
and Coatings  
Company, Inc.**

WATERPROOFING CONTRACTORS

**General Caulking and Coatings Company**

3004 Kananwood Court, Ste 140, Oviedo, FL 32765

[OrlandoAdmin@generalcaulking.com](mailto:OrlandoAdmin@generalcaulking.com)

407-365-4923

<b>PROJECT</b>	Lake County Fire Stations Wind Mitigation
<b>CONTRACTOR</b>	Scorpio
<b>SENT TO</b>	Maverick Maensivu; Ana Palm;
<b>PROJECT MANAGER</b>	Todd Kanistras
<b>DATE SUBMITTED</b>	December 03, 2025

SPEC	TYPE	PRODUCT	LOCATION	TDS	SDS	Color Chart
	Joint Sealants	Tremco Dymonic 100	Caulking new louvers, penetrations, doors and windows that are new and have been replaced	X	X	X

## PRODUCT DESCRIPTION

Dymonic® 100 is a single-component, medium-modulus, non-sag polyurethane sealant. Dymonic 100 offers a high-performance, high-movement, durable, flexible seal that performs excellently in moving joints and exhibits tenacious adhesion to substrates once fully cured.

## BASIC USES


Typical applications for Dymonic 100 include expansion and control joints, precast concrete panel joints, perimeter caulking (windows, doors, and panels), aluminum, masonry, and vinyl siding. Dymonic 100 is also an excellent choice as a fluid applied flashing material in rough opening perimeters for fenestration/window, door and curtain wall applications. Dymonic 100 is suitable for water immersion applications and will not out gas.

## FEATURES & BENEFITS

Dymonic 100 has been formulated with an innovative polymer technology, similar to TREMproof® 250GC and Vulkem® 45SSL, that allows it to be highly versatile and grants its unique capability to adhere to damp or green concrete without outgassing. The skin time of Dymonic 100 is 2 hours and the tack-free time is 6 to 8 hours. This significantly reduces dirt attraction and improves the overall aesthetic look.

Dymonic 100 has a movement capability of +100/-50% in typical field conditions with excellent performance in moving joints. The formula is low-VOC and UV-stable, meaning Dymonic 100 will not crack, craze, or yellow under extreme UV exposure. Additionally, Dymonic 100 is jet fuel-resistant and compatible with many common construction substrates.

- Compatible with and can be coated over with Tremco's Vulkem Deck Coatings, ExoAir® Air Barrier products and the cold, fluid-applied TREMproof® line of below-grade waterproofing products
- Accepted for use over Nudura Insulated Concrete Forms (ICF)

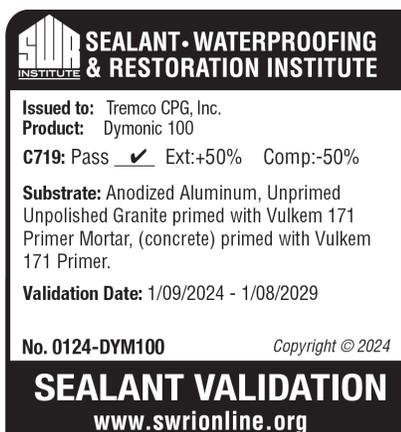

There are 21 standard color options available for Dymonic 100, with the option of painting over the sealant.

Dymonic 100 meets or exceeds the requirements of the following specifications:

- ASTM C920 Type S, Grade NS, Class 50, Use NT, T, M, A, O, I
- U.S. Federal Specification TT-S-00230C, Class A, Type II
- CAN/CGSB-19,13-M87
- International Code Council (ICC) Section R703.8 Flashing

- AAMA 714-15 Specification for Liquid-Applied Flashing
- NFPA 285 Listed Component

Accepted fire rated systems: FF-D-1186, FW-D-1117, HW-D-1122, WW-D-1200, and BW-S-0006

## AVAILABILITY

Immediately available from your local Tremco Sales Representative, Tremco Distributor, or Tremco Warehouse in 10.1 oz (300 mL) cartridges and 20 oz (600 mL) sausages.

## COLORS

Available in Almond, Aluminum Stone, Anodized Aluminum, Beige, Black, Bronze, Buff, Dark Bronze, Gray, Gray Stone, Hartford Green, Ivory, Light Bronze, Limestone, Natural Clay, Off White, Precast White, Redwood Tan, Sandalwood, Stone, and White.

## LIMITATIONS

Use with adequate ventilation. Always utilize the accompanying SDS for information on Personal Protective Equipment (PPE) and Health Hazards. Not recommended for use in chlorinated, potable, heavy or waste water. Although Dymonic 100 is paintable, this does not imply adhesion to and compatibility with all paints. Consult Tremco Technical Bulletin No. S-09-05 or Tremco Technical Services for more information.

## WARRANTY

A repair or replacement warranty is available on all Tremco products. Visit <https://www.tremcosealants.com/warranties/> for details.

## TYPICAL PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	TYPICAL RESULTS
Rheological Properties	ASTM C639	Non-sag (NS), 0" of sag in channel
Hardness Properties	ASTM C661	40 ± 5
Weight Loss	ASTM C1246	Pass
Skin Time	ASTM C679	2 to 3 hr
Tack Free Time	73.4°F (23°C) 50% RH	6 to 8 hr
Stain and Color Change	ASTM C510	Pass
Adhesion to Concrete	ASTM C794	35 pli
Adhesion to Concrete After Immersion	ASTM C794	30 pli
Adhesion to Green Concrete	ASTM C794	>25 pli
Adhesion to Damp Concrete	ASTM C794	>20 pli
Effects of Accelerated Aging	ASTM C793	Pass
Movement Capability	ASTM C719	± 50%
Movement Capability	ASTM C719 (Modified)	+100/-50%
Tensile Strength	ASTM D412	350 to 450 psi
% Elongation	ASTM D412	800 to 900%
Modulus at 100%	ASTM D412	75 to 85 psi
Tear Strength	ASTM D412	65 to 75 psi

## TYPICAL PHYSICAL PROPERTIES

Fungal Resistance	ASTM G21-15	Fungal Resistance = 0, No Growth
Service Temperature		-40 to 180 °F (-40 to 82 °C)
Application Temperature		40 to 100 °F (4 to 37 °C) *
Smoke Development, Fire Spread	ASTM E84	5, 5
Smoke Development, Fire Spread	CAN S102	10, 10
Fire Resistance of Assembly	NFPA 285	Pass
Crack Bridging	ASTM C1305	Pass
Nail Seal Ability	ASTM D1970 Section 7.9	Pass
*For temperatures below 40 °F, please refer to the Technical Bulletin, Cold Temperature Sealant Application Recommendations.		

Please refer to our website at [www.tremcosealants.com](http://www.tremcosealants.com) for the most up-to-date Product Data Sheets.

**NOTE: All Tremco Safety Data Sheets (SDS) are in alignment with the Globally Harmonized System of Classification and Labelling of Chemicals (GHS) requirements.**

D100-DS/0724

Tremco Construction Products Group (CPG) brings together Tremco CPG Inc. and its Dryvit and Nudura brands; Willseal; Prebuck LLC; Tremco Barrier Solutions, Inc.; Weatherproofing Technologies, Inc. and its Pure Air Control Services and Canam Building Envelope Specialists offerings; and Weatherproofing Technologies Canada, Inc.



[tremcosealants.com](http://tremcosealants.com) | 800.321.7906



Construction Products Group

3735 Green Rd. | Beachwood, OH 44122  
800.321.7906 | [tremcocpg.com](http://tremcocpg.com)

# SAFETY DATA SHEET

## 1. Identification

**Material name:** DYMONIC 100 LIMESTONE - 30 ctg cs  
**Material:** 965805C323

### Recommended use and restriction on use

**Recommended use:** Sealant

Sealant

Sealant

**Restrictions on use:** Not known.

### Manufacturer/Importer/Supplier/Distributor Information

Tremco U.S Sealants  
3735 Green Road  
Beachwood OH 44122  
US

**Contact person:**

EH&S Department

**Telephone:**

216-292-5000

**Emergency telephone number:**

1-800-424-9300 (US); 1-613-996-6666 (Canada)

## 2. Hazard(s) identification

### Hazard Classification

#### Health Hazards

Acute toxicity (Inhalation - dust and mist)	Category 4
Respiratory sensitizer	Category 1
Skin sensitizer	Category 1
Carcinogenicity	Category 1A
Toxic to reproduction	Category 1B

#### Unknown toxicity - Health

Acute toxicity, oral	26.14 %
Acute toxicity, dermal	29.18 %
Acute toxicity, inhalation, vapor	94.36 %
Acute toxicity, inhalation, dust or mist	93.46 %

#### Environmental Hazards

Acute hazards to the aquatic environment	Category 3
Chronic hazards to the aquatic environment	Category 3

#### Unknown toxicity - Environment

Acute hazards to the aquatic environment	93.21 %
Chronic hazards to the aquatic environment	92.7 %

## Label Elements

### Hazard Symbol:



**Signal Word:** Danger

**Hazard Statement:** Harmful if inhaled.  
May cause allergy or asthma symptoms or breathing difficulties if inhaled.  
May cause an allergic skin reaction.  
May cause cancer.  
May damage fertility or the unborn child.  
Harmful to aquatic life with long lasting effects.

### Precautionary Statements

**Prevention:** Avoid breathing dust/fume/gas/mist/vapors/spray. Use only outdoors or in a well-ventilated area. [In case of inadequate ventilation] wear respiratory protection. Contaminated work clothing should not be allowed out of the workplace. Wear protective gloves/protective clothing/eye protection/face protection. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Avoid release to the environment.

**Response:** IF INHALED: Remove person to fresh air and keep comfortable for breathing. If experiencing respiratory symptoms: Call a POISON CENTER or doctor/ physician. IF ON SKIN: Wash with plenty of soap and water. If skin irritation or rash occurs: Get medical advice/attention. Call a POISON CENTER/doctor if you feel unwell. Specific treatment (see on this label). Wash contaminated clothing before reuse.

**Storage:** Store locked up.

**Disposal:** Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

**Hazard(s) not otherwise classified (HNOC):** None.

## 3. Composition/information on ingredients

## Mixtures

Chemical Identity	CAS number	Content in percent (%)*
Calcium carbonate	471-34-1	20 - <50%
Polyvinyl chloride	9002-86-2	5 - <10%
Calcium Carbonate (Limestone)	1317-65-3	5 - <10%
Xylene	1330-20-7	1 - <5%
Calcium oxide	1305-78-8	1 - <5%
Titanium dioxide	13463-67-7	1 - <5%
Diisodecyl phthalate	26761-40-0	0.3 - <1%
Ethylbenzene	100-41-4	0.1 - <1%
Isophorone Diisocyanate	4098-71-9	0.1 - <1%
Hydrotreated heavy naphthenic distillate	64742-52-5	0.1 - <1%
Stearic acid	57-11-4	0.1 - <1%
Dibutyl tin dilaurate	77-58-7	0.1 - <0.3%
Iodopropynyl butylcarbamate	55406-53-6	0.01 - <0.1%

\* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

## 4. First-aid measures

### Description of necessary first-aid measures

- Inhalation:** Call a physician or poison control center immediately. If breathing stops, provide artificial respiration. Move to fresh air. If breathing is difficult, give oxygen.
- Skin Contact:** If skin irritation occurs: Get medical advice/attention. Destroy or thoroughly clean contaminated shoes. Immediately remove contaminated clothing and shoes and wash skin with soap and plenty of water. If skin irritation or an allergic skin reaction develops, get medical attention.
- Eye contact:** Any material that contacts the eye should be washed out immediately with water. If easy to do, remove contact lenses. If eye irritation persists: Get medical advice/attention.
- Ingestion:** Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
- Personal Protection for First-aid Responders:** Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

### Most important symptoms/effects, acute and delayed

- Symptoms:** May cause skin and eye irritation.
- Hazards:** No data available.

### Indication of immediate medical attention and special treatment needed

- Treatment:** Symptoms may be delayed.

## 5. Fire-fighting measures

**General Fire Hazards:** No unusual fire or explosion hazards noted.

**Suitable (and unsuitable) extinguishing media**

**Suitable extinguishing media:** Use fire-extinguishing media appropriate for surrounding materials.

**Unsuitable extinguishing media:** Do not use water jet as an extinguisher, as this will spread the fire.

**Specific hazards arising from the chemical:** During fire, gases hazardous to health may be formed.

**Special protective equipment and precautions for firefighters**

**Special fire fighting procedures:** No data available.

**Special protective equipment for fire-fighters:** Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

**6. Accidental release measures**

**Personal precautions, protective equipment and emergency procedures:** Ventilate closed spaces before entering them. Evacuate area. See Section 8 of the SDS for Personal Protective Equipment. Keep upwind. Keep unauthorized personnel away. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.

**Accidental release measures:** In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

**Methods and material for containment and cleaning up:** Collect spillage in containers, seal securely and deliver for disposal according to local regulations.

**Environmental Precautions:** Do not contaminate water sources or sewer. Prevent further leakage or spillage if safe to do so. Avoid release to the environment.

**7. Handling and storage**

**Handling**

**Technical measures (e.g. Local and general ventilation):** Mechanical ventilation or local exhaust ventilation may be required. Observe good industrial hygiene practices. Observe occupational exposure limits and minimize the risk of inhalation of dust.

**Safe handling advice:** Ventilate well, avoid breathing vapors. Use approved respirator if air contamination is above accepted level. Use mechanical ventilation in case of handling which causes formation of dust. Wash hands thoroughly after handling. Do not handle until all safety precautions have been read and understood. Obtain special instructions before use. Use personal protective equipment as required. Do not breathe dust/fume/gas/mist/vapors/spray. Avoid contact with eyes, skin, and clothing.

**Contact avoidance measures:** No data available.

**Hygiene measures:** Observe good industrial hygiene practices. Wash hands before breaks and immediately after handling the product. Do not handle until all safety precautions have been read and understood. Obtain special instructions before use. Contaminated work clothing should not be allowed out of the workplace. Avoid contact with skin.

**Storage**

**Safe storage conditions:** Store locked up.

**Safe packaging materials:** No data available.

**8. Exposure controls/personal protection**

**Control Parameters**

**Occupational Exposure Limits**

Chemical Identity	Type	Exposure Limit Values	Source
Calcium carbonate - Total dust.	PEL	15 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Calcium carbonate - Respirable fraction.	PEL	5 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
	TWA	5 mg/m3	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (09 2016)
Calcium carbonate - Inhalable particles.	TWA	10 mg/m3	US. ACGIH Threshold Limit Values, as amended (01 2021)
Calcium carbonate - Respirable particles.	TWA	3 mg/m3	US. ACGIH Threshold Limit Values, as amended (01 2021)
Calcium carbonate - Respirable fraction.	TWA	15 millions of particles per cubic foot of air	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (09 2016)
Calcium carbonate - Total dust.	TWA	15 mg/m3	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (09 2016)
	PEL	15 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (01 2017)
	TWA	50 millions of particles per cubic foot of air	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (09 2016)
Calcium carbonate - Respirable fraction.	PEL	5 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (01 2017)
Polyvinyl chloride - Respirable fraction.	TWA	1 mg/m3	US. ACGIH Threshold Limit Values, as amended (2011)
Polyvinyl chloride - as vinyl chloride monomer	TWA	1 ppm	US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053), as amended (02 2006)
	STEL	5 ppm	US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053), as amended (02 2006)
	OSHA_ACT	0.5 ppm	US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053), as amended (02 2006)
Polyvinyl chloride - Respirable fraction.	PEL	5 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)

Polyvinyl chloride - Total dust.	PEL	15 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
	TWA	50 millions of particles per cubic foot of air	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (2000)
Polyvinyl chloride - Respirable fraction.	TWA	15 millions of particles per cubic foot of air	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (2000)
Polyvinyl chloride - Total dust.	TWA	15 mg/m3	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (2000)
Polyvinyl chloride - Respirable fraction.	TWA	5 mg/m3	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (2000)
Calcium Carbonate (Limestone) - Total dust.	PEL	15 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Calcium Carbonate (Limestone) - Respirable fraction.	PEL	5 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Xylene	PEL	100 ppm 435 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
	STEL	150 ppm	US. ACGIH Threshold Limit Values, as amended (2008)
	TWA	100 ppm	US. ACGIH Threshold Limit Values, as amended (2008)
Calcium oxide	TWA	2 mg/m3	US. ACGIH Threshold Limit Values, as amended (2011)
	PEL	5 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Titanium dioxide	TWA	10 mg/m3	US. ACGIH Threshold Limit Values, as amended (2011)
Titanium dioxide - Total dust.	PEL	15 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Titanium dioxide - Respirable fraction.	TWA	15 millions of particles per cubic foot of air	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (03 2016)
Titanium dioxide - Total dust.	TWA	15 mg/m3	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (03 2016)
Titanium dioxide - Respirable fraction.	TWA	5 mg/m3	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (03 2016)
Titanium dioxide - Total dust.	TWA	50 millions of particles per cubic foot of air	US. OSHA Table Z-3 (29 CFR 1910.1000), as amended (03 2016)
Ethylbenzene	TWA	20 ppm	US. ACGIH Threshold Limit Values, as amended (2011)
	PEL	100 ppm 435 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Isophorone Diisocyanate	TWA	0.005 ppm	US. ACGIH Threshold Limit Values, as amended (2011)
Hydrotreated heavy naphthenic distillate	PEL	500 ppm 2,000 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Hydrotreated heavy naphthenic distillate - Mist.	PEL	5 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)
Hydrotreated heavy naphthenic distillate - Inhalable fraction.	TWA	5 mg/m3	US. ACGIH Threshold Limit Values, as amended (03 2014)
Stearic acid - Respirable fraction.	TWA	3 mg/m3	US. ACGIH Threshold Limit Values, as amended (03 2017)
Stearic acid - Inhalable	TWA	10 mg/m3	US. ACGIH Threshold Limit Values, as

fraction.			amended (03 2017)
Dibutyl tin dilaurate - as Sn	STEL	0.2 mg/m3	US. ACGIH Threshold Limit Values, as amended (2011)
	TWA	0.1 mg/m3	US. ACGIH Threshold Limit Values, as amended (2011)
	PEL	0.1 mg/m3	US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000), as amended (02 2006)

Chemical name	Type	Exposure Limit Values	Source
Calcium carbonate - Total dust.	STEL	20 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium carbonate - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium carbonate - Total dust.	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium carbonate - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Calcium carbonate - Inhalable particles.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Calcium carbonate - Respirable fraction.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Calcium carbonate - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Calcium carbonate - Respirable particles.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Calcium carbonate - Inhalable fraction.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Polyvinyl chloride - Respirable.	TWA	1 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Polyvinyl chloride - Respirable fraction.	TWA	1 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Polyvinyl chloride - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Calcium Carbonate (Limestone) - Total dust.	STEL	20 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)

Calcium Carbonate (Limestone) - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium Carbonate (Limestone) - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Xylene	STEL	150 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	TWA	100 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Xylene	STEL	150 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
	TWA	100 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Xylene	TWA	100 ppm 434 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	STEL	150 ppm 651 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	100 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)

Calcium oxide	TWA	2 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium oxide	TWA	2 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Calcium oxide	TWA	2 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Titanium dioxide - Total dust.	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Titanium dioxide - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Titanium dioxide	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Titanium dioxide - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Ethylbenzene	TWA	20 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (09 2011)
Ethylbenzene	TWA	20 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Ethylbenzene	TWA	20 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Isophorone Diisocyanate	TWA	0.005 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	CEILING	0.01 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Isophorone Diisocyanate	TWA	0.005 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
	CEV	0.02 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Isophorone Diisocyanate	TWA	0.005 ppm 0.045 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	0.005 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Hydrotreated heavy naphthenic distillate - Mist.	TWA	1 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (05 2013)
Hydrotreated heavy naphthenic distillate - Inhalable fraction.	TWA	5 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Hydrotreated heavy naphthenic distillate - Mist.	STEL	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	5 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)

	TWA	0.2 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
--	-----	-----------	--

Chemical name	Type	Exposure Limit Values	Source
Calcium carbonate - Total dust.	STEL	20 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium carbonate - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium carbonate - Total dust.	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium carbonate - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Calcium carbonate - Inhalable particles.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Calcium carbonate - Respirable fraction.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Calcium carbonate - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Calcium carbonate - Respirable particles.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Calcium carbonate - Inhalable fraction.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Polyvinyl chloride - Respirable.	TWA	1 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Polyvinyl chloride - Respirable fraction.	TWA	1 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Polyvinyl chloride - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Calcium Carbonate (Limestone) - Total dust.	STEL	20 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)

Calcium Carbonate (Limestone) - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium Carbonate (Limestone) - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Xylene	STEL	150 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	TWA	100 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Xylene	STEL	150 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
	TWA	100 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Xylene	TWA	100 ppm 434 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	STEL	150 ppm 651 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	100 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)

Calcium oxide	TWA	2 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Calcium oxide	TWA	2 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Calcium oxide	TWA	2 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Titanium dioxide - Total dust.	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Titanium dioxide - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Titanium dioxide	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Titanium dioxide - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Diisodecyl phthalate	TWA	5 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Ethylbenzene	TWA	20 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (09 2011)
Ethylbenzene	TWA	20 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Ethylbenzene	TWA	20 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Isophorone Diisocyanate	TWA	0.005 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	CEILING	0.01 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Isophorone Diisocyanate	TWA	0.005 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
	CEV	0.02 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Isophorone Diisocyanate	TWA	0.005 ppm 0.045 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	0.005 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)

Hydrotreated heavy naphthenic distillate - Mist.	TWA	1 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (05 2013)
Hydrotreated heavy naphthenic distillate - Inhalable fraction.	TWA	5 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Hydrotreated heavy naphthenic distillate - Mist.	STEL	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	5 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	0.2 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Stearic acid - Respirable fraction.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Stearic acid - Respirable.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (01 2021)
Stearic acid - Inhalable	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (01 2021)
Stearic acid	TWA	10 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Dibutyl tin dilaurate - as Sn	STEL	0.2 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	TWA	0.1 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Dibutyl tin dilaurate - as Sn	TWA	0.1 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Dibutyl tin dilaurate - as Sn	STEL	0.2 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	0.1 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)

Aluminum oxide - Respirable fraction.	TWA	1 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Aluminum oxide - Inhalable fraction.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Aluminum oxide - Respirable fraction.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Aluminum oxide - Total dust. - as Al	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Aluminum oxide - Respirable.	TWA	1.0 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Aluminum oxide - Total dust.	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Aluminum oxide - Inhalable particles.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Aluminum oxide - Respirable particles.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Aluminum oxide - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Toluene	TWA	20 ppm	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Toluene	TWA	20 ppm	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Toluene	TWA	50 ppm 188 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	50 ppm	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Diisodecyl phthalate (mixed Is)	TWA	5 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (08 2017)
Stannous octoate - as Sn	TWA	0.1 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2018)
	STEL	0.2 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2018)
Stannous octoate - as Sn	TWA	0.1 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (08 2017)
Stannous octoate - as Sn	TWA	0.1 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	STEL	0.2 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)

Carbon Black - Inhalable	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (09 2011)
Carbon Black - Inhalable fraction.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Carbon Black - Inhalable dust.	TWA	3 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Zirconium dioxide - as Zr	STEL	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	TWA	5 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Zirconium dioxide - as Zr	TWA	5 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
	STEL	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Zirconium dioxide - as Zr	TWA	5 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	STEL	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)

Zirconium dioxide - Respirable fraction.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Zirconium dioxide - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (04 2019)
Zirconium dioxide - Inhalable fraction.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Zirconium dioxide - Inhalable particles.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Zirconium dioxide - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Zirconium dioxide - Total dust.	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Zirconium dioxide - Respirable particles.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Amorphous silica - Total	TWA	4 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Amorphous silica - Respirable.	TWA	1.5 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Amorphous silica - Respirable dust.	TWA	6 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Amorphous silica - Respirable fraction.	TWA	3 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Amorphous silica - Inhalable fraction.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Amorphous silica - Respirable particles.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Amorphous silica - Total dust.	TWA	10 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Amorphous silica - Respirable fraction.	TWA	3 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Amorphous silica - Total dust.	TWA	10 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)
Amorphous silica - Inhalable particles.	TWA	10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (01 2020)
Crystalline Silica (Quartz)/ Silica Sand - Respirable fraction.	TWA	0.10 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
Crystalline Silica (Quartz)/ Silica Sand - Respirable dust.	TWA	0.1 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
Crystalline Silica (Quartz)/ Silica Sand - Respirable fraction.	TWA	0.025 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (06 2020)

1,2,4-Trimethylbenzene	TWA	25 ppm	123 mg/m3	Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2), as amended (07 2009)
1,2,4-Trimethylbenzene	TWA	25 ppm		Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
1,2,4-Trimethylbenzene	TWA	25 ppm		Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
1,2,4-Trimethylbenzene	TWA	25 ppm		Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
1,3,5-Trimethylbenzene	TWA	25 ppm		Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
1,3,5-Trimethylbenzene	TWA	25 ppm		Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
2-Ethylhexanoic acid - Vapor and aerosol, inhalable.	TWA		5 mg/m3	Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
2-Ethylhexanoic acid - Inhalable fraction and vapor.	TWA		5 mg/m3	Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Methanol	TWA	200 ppm		Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Methanol	TWA	200 ppm		Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
	STEL	250 ppm		Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	STEL	250 ppm		Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (11 2010)
Methanol	STEL	250 ppm	328 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	200 ppm	262 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	200 ppm		Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)
Benzene	STEL	2.5 ppm		Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
	TWA	0.5 ppm		Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Biological Substances, Occupational Health and Safety Regulation 296/97, as amended) (07 2007)
Benzene	TWA	0.5 ppm		Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)
	STEL	2.5 ppm		Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents), as amended (06 2015)

Benzene	TWA	1 ppm	3 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	STEL	5 ppm	15.5 mg/m3	Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (09 2017)
	TWA	1 ppm		Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety), as amended (03 2020)

### Biological Limit Values

Chemical Identity	Exposure Limit Values	Source
Xylene (Methylhippuric acids: Sampling time: End of shift.)	1.5 g/g (Creatinine in urine)	ACGIH BEI (03 2013)
Ethylbenzene (Sum of mandelic acid and phenylglyoxylic acid: Sampling time: End of shift.)	0.15 g/g (Creatinine in urine)	ACGIH BEI (02 2014)

### Appropriate Engineering Controls

Mechanical ventilation or local exhaust ventilation may be required. Observe good industrial hygiene practices. Observe occupational exposure limits and minimize the risk of inhalation of dust.

### Individual protection measures, such as personal protective equipment

#### Eye/face protection:

Wear safety glasses with side shields (or goggles).

#### Skin Protection

##### Hand Protection:

Additional Information: Use suitable protective gloves if risk of skin contact.

##### Skin and Body Protection:

Wear suitable protective clothing. Wear chemical-resistant gloves, footwear, and protective clothing appropriate for the risk of exposure. Contact health and safety professional or manufacturer for specific information.

##### Respiratory Protection:

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. Air-purifying respirator with an appropriate, government approved (where applicable), air-purifying filter, cartridge or canister. Contact health and safety professional or manufacturer for specific information.

##### Hygiene measures:

Observe good industrial hygiene practices. Wash hands before breaks and immediately after handling the product. Do not handle until all safety precautions have been read and understood. Obtain special instructions before use. Contaminated work clothing should not be allowed out of the workplace. Avoid contact with skin.

## 9. Physical and chemical properties

**Appearance**

<b>Physical state:</b>	solid solid solid
<b>Form:</b>	Paste Paste Paste
<b>Color:</b>	Grey-yellowish
<b>Odor:</b>	Mild, Mild , Mild
<b>Odor threshold:</b>	No data available.
<b>pH:</b>	No data available.
<b>Melting point/freezing point:</b>	No data available.
<b>Initial boiling point and boiling range:</b>	No data available.
<b>Flash Point:</b>	No data available.
<b>Evaporation rate:</b>	Slower than n-Butyl Acetate Slower than n-Butyl Acetate Slower than n-Butyl Acetate
<b>Flammability (solid, gas):</b>	No No No
<b>Upper/lower limit on flammability or explosive limits</b>	
<b>Flammability limit - upper (%):</b>	No data available.
<b>Flammability limit - lower (%):</b>	No data available.
<b>Explosive limit - upper:</b>	No data available.
<b>Explosive limit - lower:</b>	No data available.
<b>Vapor pressure:</b>	No data available.
<b>Vapor density:</b>	Vapors are heavier than air and may travel along the floor and in the bottom of containers. Vapors are heavier than air and may travel along the floor and in the bottom of containers. Vapors are heavier than air and may travel along the floor and in the bottom of containers.
<b>Relative density:</b>	1.3297
<b>Solubility(ies)</b>	
<b>Solubility in water:</b>	Insoluble in water Insoluble in water Insoluble in water
<b>Solubility (other):</b>	No data available.
<b>Partition coefficient (n-octanol/water):</b>	No data available.
<b>Auto-ignition temperature:</b>	No data available.
<b>Decomposition temperature:</b>	No data available.
<b>Viscosity:</b>	No data available.

**10. Stability and reactivity**

<b>Reactivity:</b>	No data available.
<b>Chemical Stability:</b>	Material is stable under normal conditions.
<b>Possibility of hazardous reactions:</b>	No data available.
<b>Conditions to avoid:</b>	Avoid heat or contamination.

<b>Incompatible Materials:</b>	Alcohols. Amines. Strong acids. Avoid contact with oxidizing agents (e.g. nitric acid, peroxides and chromates). Strong bases. Water, moisture. Alcohols. Amines. Strong acids. Avoid contact with oxidizing agents (e.g. nitric acid, peroxides and chromates). Strong bases. Water, moisture. Alcohols. Amines. Strong acids. Avoid contact with oxidizing agents (e.g. nitric acid, peroxides and chromates). Strong bases. Water, moisture.
<b>Hazardous Decomposition Products:</b>	Thermal decomposition or combustion may liberate carbon oxides and other toxic gases or vapors.

## 11. Toxicological information

### Information on likely routes of exposure

<b>Inhalation:</b>	In high concentrations, vapors, fumes or mists may irritate nose, throat and mucus membranes.
<b>Skin Contact:</b>	May be harmful in contact with skin. Causes mild skin irritation. May cause an allergic skin reaction.
<b>Eye contact:</b>	Eye contact is possible and should be avoided.
<b>Ingestion:</b>	May be harmful if swallowed.

### Symptoms related to the physical, chemical and toxicological characteristics

<b>Inhalation:</b>	No data available.
<b>Skin Contact:</b>	No data available.
<b>Eye contact:</b>	No data available.
<b>Ingestion:</b>	No data available.

### Information on toxicological effects

#### Acute toxicity (list all possible routes of exposure)

<b>Oral Product:</b>	ATEmix: 4,933.82 mg/kg
<b>Dermal Product:</b>	ATEmix: 4,299.72 mg/kg
<b>Inhalation Product:</b>	ATEmix: 25.84 mg/l ATEmix : 4.09 mg/l

<b>Repeated dose toxicity Product:</b>	No data available.
--	--------------------

<b>Skin Corrosion/Irritation Product:</b>	No data available.
---	--------------------

**Specified substance(s):**

Calcium carbonate	in vivo (Rabbit): Not irritant , 24 - 72 h
Xylene	in vivo (Rat): Slightly irritating , 24 h
Titanium dioxide	in vivo (Rabbit): Not irritant , 24 h
Hydrotreated heavy naphthenic distillate	in vivo (Rabbit): Category 2 , 24 - 72 h
Stearic acid	in vivo (Rabbit): Not irritant , 24 - 72 h
Dibutyl tin dilaurate	In vitro (Human, in vitro reconstituted epidermis model): Not irritant , 15 min

**Serious Eye Damage/Eye Irritation**

**Product:** No data available.

**Specified substance(s):**

Calcium carbonate	Rabbit, 24 - 72 hrs: Not irritating
Xylene	Rabbit, 24 hrs: Moderately irritating
Titanium dioxide	Rabbit, 24 hrs: Not irritating
Ethylbenzene	Rabbit, 7 d: Slightly irritating
Hydrotreated heavy naphthenic distillate	Rabbit, 24 hrs: Not irritating
Stearic acid	Rabbit, 27 - 72 hrs: Not irritating
Dibutyl tin dilaurate	Rabbit, 24 hrs: Highly irritating

**Respiratory or Skin Sensitization**

**Product:** May cause allergy or asthma symptoms or breathing difficulties if inhaled.  
May cause sensitization by inhalation.

**Carcinogenicity**

**Product:** Suspected of causing cancer.

**IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:**

Titanium dioxide	Overall evaluation: Possibly carcinogenic to humans.
Ethylbenzene	Overall evaluation: Possibly carcinogenic to humans.

**US. National Toxicology Program (NTP) Report on Carcinogens:**

No carcinogenic components identified

**US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050), as amended:**

Polyvinyl chloride

Cancer

**Germ Cell Mutagenicity****In vitro****Product:** No data available.**In vivo****Product:** No data available.**Reproductive toxicity****Product:** May damage fertility or the unborn child.**Specific Target Organ Toxicity - Single Exposure****Product:** No data available.**Specific Target Organ Toxicity - Repeated Exposure****Product:** No data available.**Aspiration Hazard****Product:** No data available.**Other effects:** No data available.**12. Ecological information****Ecotoxicity:****Acute hazards to the aquatic environment:****Fish****Product:** No data available.**Specified substance(s):**Xylene LC 50 (Fathead minnow (*Pimephales promelas*), 96 h): 13.41 mg/l MortalityTitanium dioxide LC 50 (*Pimephales promelas*, 96 h): 8.2 mg/l Read-across from supporting substance (structural analogue or surrogate), Supporting studyDiisodecyl phthalate LC 50 (Fathead minnow (*Pimephales promelas*), 96 h): > 0.47 mg/l MortalityEthylbenzene LC 50 (*Oncorhynchus mykiss*, 96 h): 4.2 mg/l Experimental result, Key studyIsophorone Diisocyanate LC 50 (*Cyprinus carpio*, 96 h): > 208 mg/l Experimental result, Key study

Hydrotreated heavy naphthenic distillate

LL 50 (Pimephales promelas, 96 h): > 100 mg/l Experimental result, Key study

Iodopropynyl butylcarbamate

LC 50 (Rainbow trout,donaldson trout (Oncorhynchus mykiss), 96 h): 0.05 - 0.089 mg/l Mortality

#### Aquatic Invertebrates

##### Product:

No data available.

##### Specified substance(s):

Titanium dioxide

EC 50 (Water flea (Daphnia magna), 48 h): > 1,000 mg/l Intoxication

Diisodecyl phthalate

EC 50 (Opossum shrimp (Americamysis bahia), 96 h): > 0.08 mg/l Mortality

Ethylbenzene

EC 50 (Daphnia magna, 48 h): 1.8 - 2.4 mg/l Experimental result, Key study

Isophorone Diisocyanate

EC 50 (Daphnia magna, 48 h): 27 mg/l Experimental result, Key study

Hydrotreated heavy naphthenic distillate

LL 50 (Gammarus pulex, 72 h): > 10,000 mg/l Experimental result, Key study

LL 50 (Gammarus pulex, 96 h): > 10,000 mg/l Experimental result, Key study

LL 50 (Gammarus pulex, 48 h): > 10,000 mg/l Experimental result, Key study

NOAEL (Daphnia magna, 48 h): >= 10,000 mg/l Experimental result, Key study

LL 50 (Gammarus pulex, 24 h): > 10,000 mg/l Experimental result, Key study

Stearic acid

EC 50 (Daphnia magna, 48 h): > 4.8 mg/l Read-across based on grouping of substances (category approach), Weight of Evidence study

Dibutyl tin dilaurate

EC 50 (Water flea (Daphnia magna), 24 h): 0.66 mg/l Intoxication

EC 50 (Daphnia magna, 48 h): 1.7 - 3.4 mg/l Experimental result, Key study

#### Chronic hazards to the aquatic environment:

##### Fish

##### Product:

No data available.

##### Specified substance(s):

Hydrotreated heavy naphthenic distillate

NOAEL (Oncorhynchus mykiss): >= 1,000 mg/l QSAR QSAR, Supporting study

#### Aquatic Invertebrates

##### Product:

No data available.

##### Specified substance(s):

Ethylbenzene

NOAEL (Ceriodaphnia dubia): 1 mg/l Other, Key study

Isophorone Diisocyanate

NOAEL (Daphnia magna): 3 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study

Hydrotreated heavy naphthenic distillate

NOAEL (Daphnia magna): >= 1,000 mg/l Experimental result, Supporting study

NOAEL (Daphnia magna): >= 1,000 mg/l Experimental result, Supporting study

study  
NOAEL (Daphnia magna):  $\geq 1$  mg/l Experimental result, Supporting study  
EC 50 (Daphnia magna):  $> 1,000$  mg/l Experimental result, Supporting study  
EC 50 (Daphnia magna):  $> 1,000$  mg/l Experimental result, Supporting study

#### Toxicity to Aquatic Plants

**Product:** No data available.

#### Persistence and Degradability

##### Biodegradation

**Product:** No data available.

##### Specified substance(s):

Ethylbenzene 70 - 80 % (28 d) Detected in water. Experimental result, Key study

Isophorone Diisocyanate  $> 0$  % (28 d) Detected in water. Experimental result, Key study

Hydrotreated heavy naphthenic distillate  
2 - 4 % (28 d) Detected in water. Experimental result, Supporting study  
2 - 8 % (28 d) Detected in water. Experimental result, Supporting study  
31 % (28 d) Detected in water. Read-across based on grouping of substances (category approach), Supporting study  
31 % (28 d) Detected in water. Experimental result, Supporting study

Dibutyl tin dilaurate 23 % (39 d) Detected in water. Experimental result, Key study

##### BOD/COD Ratio

**Product:** No data available.

#### Bioaccumulative potential

##### Bioconcentration Factor (BCF)

**Product:** No data available.

##### Specified substance(s):

Xylene  
Oncorhynchus mykiss, Aquatic sediment Experimental result, Key study  
Oncorhynchus mykiss, Aquatic sediment Experimental result, Key study  
Oncorhynchus mykiss, Aquatic sediment Experimental result, Key study

Ethylbenzene  
Selenastrum capricornutum, Aquatic sediment Other, Supporting study  
Carassius auratus, Aquatic sediment Other, Supporting study  
Crassostrea virginica; Mytilus edulis; Tapes semidecussata, Aquatic sediment Other, Supporting study  
Oncorhynchus kisutch, Aquatic sediment Other, Key study  
Platichthys stellatus, Aquatic sediment Other, Supporting study

Isophorone Diisocyanate  
Aquatic sediment QSAR, Not specified  
Aquatic sediment QSAR, Not specified

#### Partition Coefficient n-octanol / water (log Kow)

**Product:** No data available.

##### Specified substance(s):

Xylene Log Kow: 2.77 - 3.15 No Not specified, Not specified

Diisodecyl phthalate	Log Kow: 10.36
Ethylbenzene	Log Kow: 3.15 Log Kow: 3.13 - 3.14 No Other, Supporting study
Isophorone Diisocyanate	Log Kow: 4.75
Stearic acid	Log Kow: 8.23
Dibutyl tin dilaurate	Log Kow: 3.12

**Mobility in soil:** No data available.  
**Other adverse effects:** Harmful to aquatic life with long lasting effects.

### 13. Disposal considerations

**Disposal methods:** Dispose of waste at an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.  
**Contaminated Packaging:** No data available.

### 14. Transport information

**TDG:**  
Not Regulated  
**CFR / DOT:**  
Not Regulated  
**IMDG:**  
Not Regulated

### 15. Regulatory information

**US Federal Regulations**  
**TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)**  
None present or none present in regulated quantities.  
**US. Toxic Substances Control Act (TSCA) Section 5(a)(2) Final Significant New Use Rules (SNURs)**  
**(40 CFR 721, Subpt E)**  
None present or none present in regulated quantities.

**US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050), as amended**

<u>Chemical Identity</u>	<u>OSHA hazard(s)</u>
Polyvinyl chloride	Blood Liver Cancer Flammability Central nervous system
Crystalline Silica (Quartz)/ Silica Sand	kidney effects lung effects immune system effects Cancer
Benzene	Blood respiratory tract irritation Central nervous system Flammability Cancer Skin Aspiration Eye

**CERCLA Hazardous Substance List (40 CFR 302.4):**

<u>Chemical Identity</u>	<u>Reportable quantity</u>
Xylene	100 lbs.
Ethylbenzene	1000 lbs.
Toluene	1000 lbs.
Methanol	5000 lbs.
Benzene	10 lbs.

**Superfund Amendments and Reauthorization Act of 1986 (SARA)**

**Hazard categories**

- Immediate (Acute) Health Hazards
- Delayed (Chronic) Health Hazard
- Acute toxicity (any route or exposure)
- Respiratory or Skin Sensitization
- Carcinogenicity
- Reproductive toxicity

**US. EPCRA (SARA Title III) Section 304 Extremely Hazardous Substances Reporting Quantities and the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) Hazardous Substances**

Not regulated.

**US. EPCRA (SARA Title III Section 313 Toxic Chemical Release Inventory (TRI) Reporting**

<u>Chemical Identity</u>	<u>% by weight</u>
Xylene	%
Ethylbenzene	%

**Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)**

None present or none present in regulated quantities.

**Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)**

**Chemical Identity**

Xylene

**Reportable quantity**

Reportable quantity: lbs.

**US State Regulations**

**US. California Proposition 65**



**WARNING**

Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**US. New Jersey Worker and Community Right-to-Know Act**

**Chemical Identity**

Calcium carbonate  
Polyvinyl chloride  
Calcium Carbonate (Limestone)  
Xylene  
Calcium oxide  
Titanium dioxide  
Ethylbenzene  
Hydrotreated heavy naphthenic distillate

**US. Massachusetts RTK - Substance List**

**Chemical Identity**

Calcium carbonate  
Calcium Carbonate (Limestone)  
Xylene  
Titanium dioxide  
Isophorone Diisocyanate  
Crystalline Silica (Quartz)/ Silica Sand

**US. Pennsylvania RTK - Hazardous Substances**

**Chemical Identity**

Calcium carbonate  
Calcium Carbonate (Limestone)  
Xylene  
Calcium oxide  
Titanium dioxide

**US. Rhode Island RTK**

**Chemical Identity**

Calcium carbonate  
Polyvinyl chloride  
Calcium Carbonate (Limestone)  
Xylene  
Titanium dioxide

**International regulations**

**Montreal protocol**

Not applicable

**Stockholm convention**

Not applicable

**Rotterdam convention**

Not applicable

**Kyoto protocol**

Not applicable

**VOC:**

Regulatory VOC (less water and  
exempt solvent) : 40 g/l

VOC Method 310 : 2.99 %

**Inventory Status:**

Australia AICS:	One or more components in this product are not listed on or exempt from the Inventory.
Canada DSL Inventory List:	All components in this product are listed on or exempt from the Inventory.
EINECS, ELINCS or NLP:	One or more components in this product are not listed on or exempt from the Inventory.
Japan (ENCS) List:	One or more components in this product are not listed on or exempt from the Inventory.
China Inv. Existing Chemical Substances:	One or more components in this product are not listed on or exempt from the Inventory.
Korea Existing Chemicals Inv. (KECI):	One or more components in this product are not listed on or exempt from the Inventory.
Canada NDSL Inventory:	One or more components in this product are not listed on or exempt from the Inventory.
Philippines PICCS:	One or more components in this product are not listed on or exempt from the Inventory.
US TSCA Inventory:	All components in this product are listed on or exempt from the Inventory.
New Zealand Inventory of Chemicals:	One or more components in this product are not listed on or exempt from the Inventory.
Japan ISHL Listing:	One or more components in this product are not listed on or exempt from the Inventory.
Japan Pharmacopoeia Listing:	One or more components in this product are not listed on or exempt from the Inventory.
Mexico INSQ:	One or more components in this

product are not listed on or exempt from the Inventory.

Ontario Inventory:

One or more components in this product are not listed on or exempt from the Inventory.

Taiwan Chemical Substance Inventory:

One or more components in this product are not listed on or exempt from the Inventory.

#### 16. Other information, including date of preparation or last revision

**Revision Date:** 01/27/2022


**Version #:** 1.2

**Further Information:** No data available.

**Disclaimer:** For Industrial Use Only. Keep out of Reach of Children. The hazard information herein is offered solely for the consideration of the user, subject to their own investigation of compliance with applicable regulations, including the safe use of the product under every foreseeable condition.

## PRODUCT DESCRIPTION

Dymonic 100 is a high-performance, high-movement, single-component, medium-modulus, low-VOC, UV-stable, non-sag polyurethane sealant.



ALMOND



IVORY



ALUMINUM STONE



LIGHT BRONZE



ANODIZED ALUMINUM



LIMESTONE



BEIGE




NATURAL CLAY



BLACK



OFF WHITE



BRONZE



PRECAST WHITE



BUFF



REDWOOD TAN



DARK BRONZE



SANDALWOOD



GRAY



STONE



GRAY STONE



WHITE



HARTFORD GREEN

This guide only offers a general representation of our color offering. Colors viewed on a computer screen and then printed will vary and will never be an exact representation of the actual pigment. When matching is critical, please refer to our color card or sample color strips.

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.

Tremco® and Dymonic® are registered trademarks of Tremco Incorporated. Willseal is a registered trademark of Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

Part of  
  
 Construction Products Group