


- BASE

*SEE THIS SHEET FOR

PAVEMENT SPECS

SECTION F-F

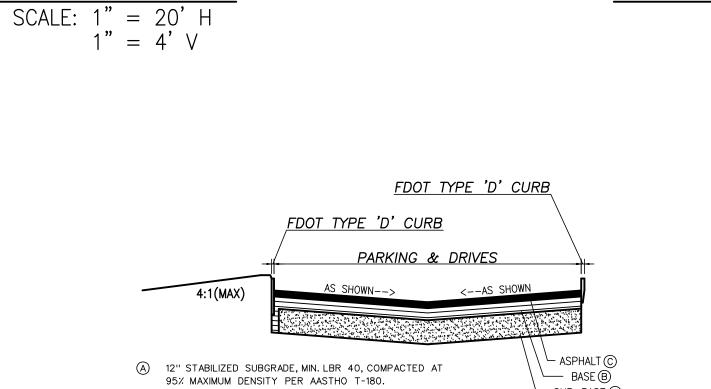

– SUB-BASE 🔕 B 8" LIMEROCK BASE, MIN. LBR OF 100 WITH 60% OR MORE CARBONATE CONTENT, COMPACTED TO 98% MAXIMUM DENSITY PER AASHTO T-180.

© 1 1/2" ASPHALT SURFACE COURSE, TYPE S-III MODIFIED (IN TWO 3/4" LIFTS)

TYPICAL PAVEMENT SECTION



- 30.0' DRIVES

└── BASE SUB-BASE

40.0'-L/S

SCALE: 1" = 20' H 1" = 4' V

— BASE

*SEE THIS SHEET FOR PAVEMENT SPECS

- SUB-BASE

SECTION G-G

SCALE: 1" = 20' H

__======== |--------

1. PRIOR TO BEGINNING ANY WORK, CONTRACTOR SHALL CONTACT ALL UTILITY COMPANIES THAT HAVE FACILITIES WITHIN THE PROJECT AREA.

/IL CO CANERI

THOMAS H. SKELTON, PE REGISTRATION NO. 42752

SHEET: 10 of: 17