




SPECIFICATIONS PACKAGE
Contract Number: G0D13
FINANCIAL PROJECT ID. 437464-1-58-01
FEDERAL FUNDS
DISTRICT FIVE
LAKE COUNTY

The applicable Articles and Subarticles of the General Requirements & Covenants division (Division I) of the July 2018 edition of the Florida Department of Transportation Standard Specifications for Road and Bridge Construction are added, and all of the Construction Details and Materials divisions (Division II & III) are revised, as follows:

I hereby certify that this specifications package has been properly prepared by me, or under my responsible charge, in accordance with procedures adopted by the Florida Department of Transportation.

Signature
and Seal: _____
Date: 2-15-2018
Engineer of Record: Oscar M. Castaneda
Fla. License No.: 82317
Firm Name: Infrastructure Engineers, Inc.
Firm Address: 1511 E. SR 434, Suite 1001
City, State, Zipcode: Winter Springs, FL 32746
Certificate of Authorization Number: 6876
Page(s): 1 - 6

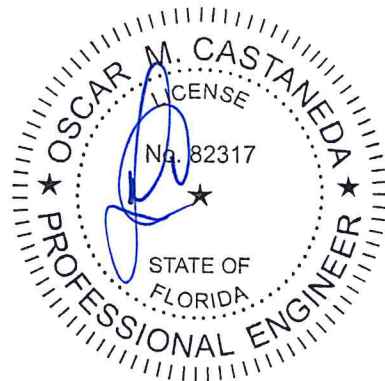

710 PAINTED PAVEMENT MARKINGS..... 3
Modified SPECIAL PROVISIONS..... 4

710 PAINTED PAVEMENT MARKINGS.
(REV 5-26-17) (FA 8-7-17) (1-18)

SUBARTICLE 710-4.1.1 is deleted and the following substituted:

710-4.1.1 Painted Pavement Markings (Final Surface): On concrete surfaces or newly constructed asphalt without rumble striping, the painted pavement markings (final surface) will include one application of standard paint and one application of Class B retroreflective pavement markers applied to the final surface.

On newly constructed asphalt with rumble striping, apply two applications of standard paint and one application of Class B retroreflective pavement markers. Additionally, for center line rumble striping installations, install Class D retroreflective pavement markers with the first application of standard paint. Remove Class D markers prior to grinding, and install Class B retroreflective pavement markers in an unground area after grinding. The second application of standard paint must be applied within 24 hours of each day's grinding operation.

Do not apply final surface paint for bicycle arrows or bicycle messages, 24 inch longitudinal bars in special emphasis crosswalks, or route shields where preformed thermoplastic will be applied.

Install all retroreflective pavement markers in accordance with Design Standards, Index Nos. 17352 and 17345, prior to opening the road to traffic.

Temporary retroreflective pavement markers must meet the requirements of Section 102.

Permanent retroreflective pavement markers must meet the requirements of Section 706.

MODIFIED SPECIAL PROVISIONS

CONTRACTOR QUALITY CONTROL GENERAL REQUIREMENTS.

SUBARTICLE 105-1.1.2 is deleted and the following substituted:

Test data shall not be required to be entered into any FDOT and/or Lake County Databases.

**THIS COMPLETES
THIS
SPECIFICATIONS
PACKAGE**