
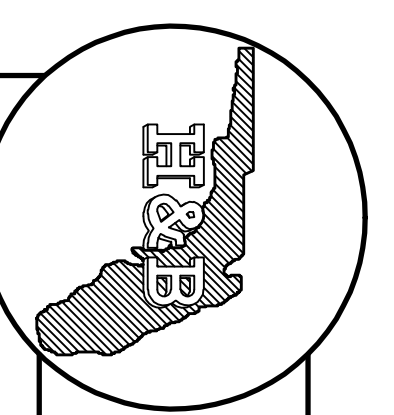


- Sequence of construction:
- Contractor to tie into the existing line and valve with the proposed line.
 - Proposed line shall NOT be opened or operated until approved by the City of Groveland.
 - As a part of the temporary 2" jumper a backflow preventer and air meter shall be installed.
 - After the new line and valve are installed the temporary jumper shall be removed.

CONDUIT TO BE INSTALLED IN THE EXISTING WATER MAIN WITH THE EXISTING VALVE SHALL BE AS PER THE CITY OF GROVELAND RULES AND REGULATIONS

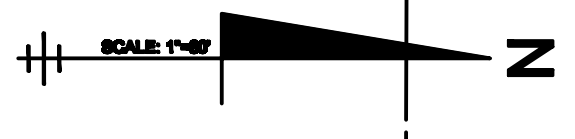

Water Main Off-Site
H & B CONSULTING ENGINEERS, INC.
 Certificate of Authorization # 4829
 P.O. Box 520
 218 N. Florida Street, Suite 3
 Bushnell, Florida 33513
 Phone : (352) 793-2113

Lake Minneola Landings
 C.R. 561 A
 Minneola, FL 34711

REVISIONS	
10/15	Rev. City Groveland Comments
Drawn: TFW	Checked: MZB
Date: 8/15	Scale: 1"=80'
Sheet 4	of 7