



**Residential Driveway Apron  
Permit Application**  
2017040693



Date: 4-17-17 Bldg Permit No. \_\_\_\_\_  
 Laura Barkman for DR Horton  
 Applicant/ Name Permit Will Be Returned To:  
6200 Leevista Blvd  
 Applicant's Street Address  
Orlando, FL 32822  
 Applicant's City, State, Zip  
 Laura E Barkman (Signature) 4079564739  
 Signature of Applicant Phone Number  
lebarkman@drhorton.com  
 Applicant's e-mail address

3905853 / 10 / 29 / 26  
 Alt. Key# Section Township Range  
3674 Maidencairn St.  
 House Number / Road Name  
Sawgrass Bay / 390  
 Subdivision Name  
Laura Barkman  
 Applicant, Please Print Name  
CBC1252212  
 Contractor License # (Required unless built by owner)

A driveway permit is required to construct a new driveway, modify an existing driveway to meet county requirements, or install a temporary construction entrance within the public rights-of-way of County maintained roads. Issuance of a driveway permit does not vest any rights to the property owner for zoning, land use changes, or site improvements. The owner must follow all County procedures for permitting.

Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch. Applicant holds Lake County harmless from all damages, claims, or injuries which may result from such work. Any deviation from the attached sketch must first be approved in writing by Lake County Public Works Department. Please see attached minimum requirement details for specifications.

- Check one:  
 Clay Road - No apron required - culvert pipe may be required - sod all disturbed areas.  
 Paved Road - Option 1: 6" limerock base and minimum 1" Type S-III Asphalt. Option 2: 6" reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement. Culvert pipe may be required - Sod all disturbed areas.

In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.

County Road # <u>0360F</u>	<b>To be completed by County Staff</b>		
Driveway Permit Fee: \$50.00	Check/Transaction #: <u>504439</u>	Date: <u>5/1/17</u>	Fee Code: PUBSV1
Permit # <u>15603</u>	Maint Area: <u>2</u>	Signed: <u>[Signature]</u>	Date Approved: <u>5-23-17</u>
Permit Shall Expire One (1) Year From Date Approved		Date Expired: <u>5/23/18</u>	
Date of Final Inspection: _____	Inspector: _____		
Comments or special conditions: _____			
<p>The design has been reviewed and upon completion should meet the regulations and requirements as noted on this application. The driveway shall be constructed per approved subdivision plans if applicable. For inspection, call Lake County Building Services Division at 352-343-9634. For joint (Common Split) driveway inspection, call Lake County Public Works Department at 352-253-6019.</p> <p>Submit permit to: <u>Lake County Public Works, Post Office Box 7800, Tavares, FL 32778</u></p>			

Public Works Department  
Road Operations Division

Entered Data One	<u>5/18/17</u>
First Scan	<u>5/18/17</u>
Updated Data One	<u>10/6/17</u>
Second Scan	<u>6/6/19</u>
Returned to Client	<u>10/6/17</u>

Residential Driveway Apron Permit  
Effective June 2015



Residential Driveway Apron Permit Application Requirements

APR 20 2017

To be completed by County Staff

2017040693

Permit Number

- Single Family Driveway (standard A)
Joint Driveway (Common/Split) (standard B)
Driveway apron as Swale Check (standard C)
Piped Driveway apron (standard D)
Driveway apron conforming to Grade or Swale (standard E)
Driveway apron with Miami Curb & Gutter (standard M)
Driveway apron with Standard Curb & Gutter (standard S)

\*The applicable driveway apron standard will be included with approved permit that is sent to applicant. \*

- 1. Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 1.5%, 6 inches minimum thickness.
2. To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 323 N. Sinclair Avenue in Tavares.
3. Driveways are not permitted in the radius return of an intersection. Driveway aprons must be 100 feet from the nearest intersecting road and may not exceed 24 feet in width at the edge of the roadway.
4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair.
5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood.
6. Driveway apron slope may not exceed 14%.
7. Driveway permit shall expire one (1) year from date approved.
8. Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements

Laura E Barkman

Applicant's Signature/Date

Digitally signed by Laura E Barkman
DN: c=US, o=Lake County, ou=Public Works, cn=Laura E Barkman

Public Works Department
Road Operations Division


Residential Driveway Apron Permit
Effective June 2015



DEPARTMENT OF PUBLIC WORKS  
 ENGINEERING DIVISION  
 437 ARDICE AVE.  
 EUSTIS, FLORIDA 32726

A

RESIDENTIAL DRIVEWAY



\* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%. OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH  
 6" COMPACTED LIMEROCK BASE  
 & 12" COMPACTED SUBGRADE

OR


6" 3,000 PSI CONCRETE  
 REINFORCED WITH 10-10x6"x6" MESH  
 & 6" COMPACTED SUBGRADE



DEPARTMENT OF PUBLIC WORKS  
ENGINEERING DIVISION  
437 ARDICE AVE.  
EUSTIS, FLORIDA 32726

E

RESIDENTIAL DRIVEWAY CONFORMING  
TO GRADE OR SWALE.

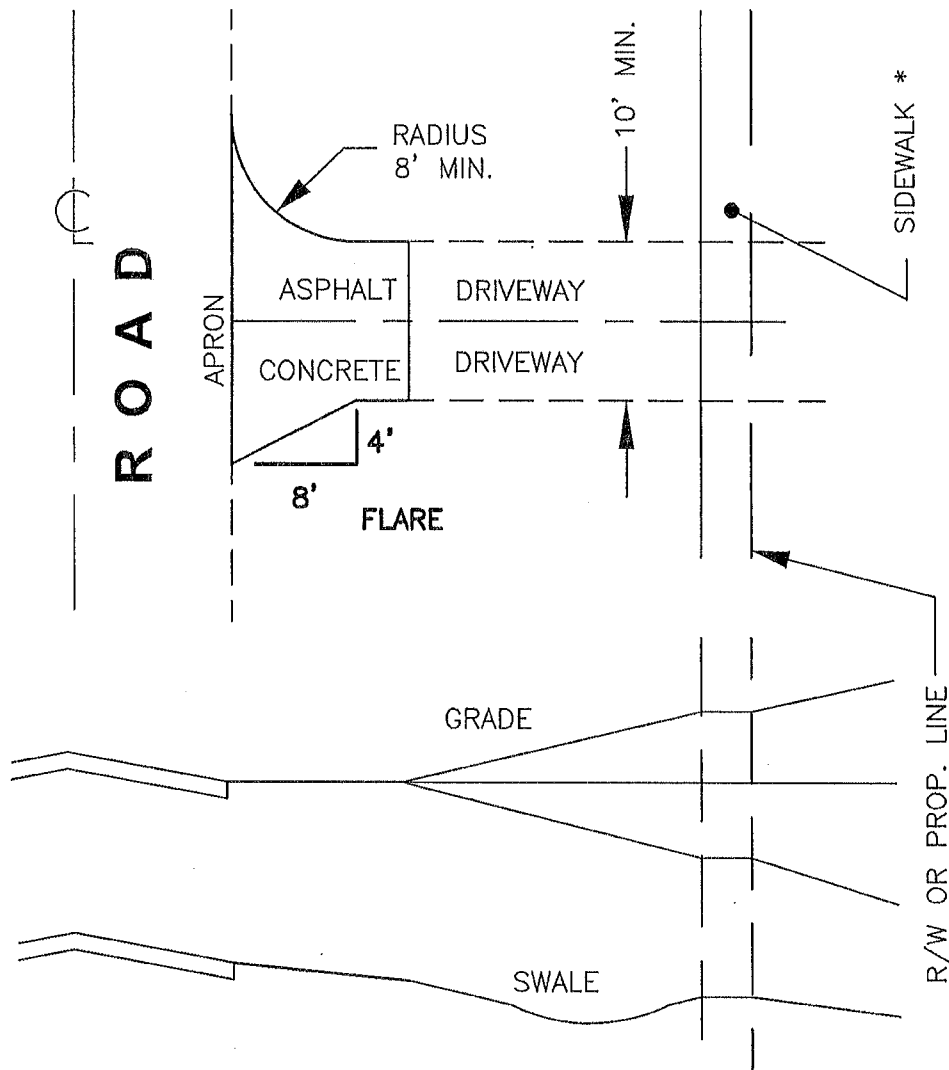

\* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 510, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH  
6" COMPACTED LIMEROCK BASE  
& 12" COMPACTED SUBGRADE

OR


6" 3,000 PSI CONCRETE  
REINFORCED WITH 10-10x6"x6" MESH  
& 6" COMPACTED SUBGRADE



DEPARTMENT OF PUBLIC WORKS  
ENGINEERING DIVISION  
437 ARDICE AVE.  
EUSTIS, FLORIDA 32726

M

## RESIDENTIAL DRIVEWAY WITH DROP "MIAMI" CURB AND GUTTER



\* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH  
6" COMPACTED LIMEROCK BASE  
& 12" COMPACTED SUBGRADE

OR

6" 3,000 PSI CONCRETE  
REINFORCED WITH 10-10x6"x6" MESH  
& 6" COMPACTED SUBGRADE