




OCT 24 2017

OCT 26 2017

Residential Driveway Apron Permit Application (Please Print or Type)

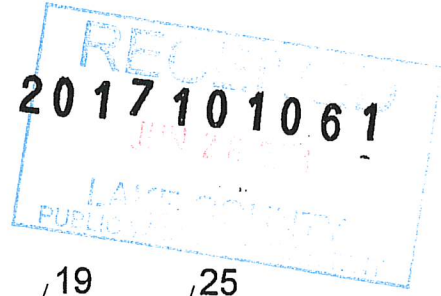

Date: _____ Bldg Permit No. _____

Jeffrey Hedges

29 19 25

Name Permit Will Be Returned To:

County Road # Section Township Range

4401 Vineland Rd Suite A-11

7631 Sloewood Drive

Street Address

House Number / Road Name

Orlando FL 32811

Park Hill Phase II

Lot 77

City, State, Zip

Subdivision Name

Signature of Applicant

407-523-1030 Phone Number

Jeffrey Hedges

Applicant, Please Print Name

orlandowarranty@adamshomes.com

Applicant's e-mail address

A driveway permit is required to construct a new driveway, modify an existing driveway to meet county requirements, or install a temporary construction entrance within the public rights-of-way of County maintained roads.

Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch.

Check one:

- Clay Road - No apron required - culvert pipe may be required - sod all disturbed areas.
Paved Road - Option 1: 6" limerock base and minimum 1" Type S-III Asphalt. Option 2: 6" reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement.

In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 2% cross slope) in compliance with ADA requirements.

Form box containing: To be completed by County Staff, Driveway Permit Fee: \$50.00, Check Number: 520311, Date: 11/30/17, Fee Code: PUBSV1, Permit # 15784, etc.

Public Works Department Funding & Production Division

Entered Data One 6/28/18, 1st Scan 6/28/18, date: D. in One, on: Co., 10:30 AM

Residential Driveway Apron Permit Effective July 2012

OCT 24 2017

OCT 26 2017 2017 10 10 61



Residential Driveway Apron Permit Application Requirements

- Single Family Driveway (standard A)
- Joint Driveway (Common/Split) (standard B)

Permit Number

- Driveway apron as Swale Check (standard C)
- Piped Driveway apron (standard D)
- Driveway apron conforming to Grade or Swale (standard E)

- Driveway apron with Miami Curb & Gutter (standard M)
- Driveway apron with Standard Curb & Gutter (standard S)

The applicable driveway apron standard will be included with approved permit that is sent to applicant.

1. Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 2%, 6 inches minimum thickness. (See detail on attachment).
2. To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 437 Ardice Avenue in Eustis.
3. Driveways are not permitted in the radius return of an intersection. Driveway aprons must be 100 feet from the nearest intersecting road and may not exceed 24 feet in width at the edge of the roadway. Variance requests should be submitted to the Lake County Public Works Department.
4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair. If pavers are removed to facilitate Lake County and/or a utility company to perform utility installation and/or maintenance, the paver(s) used as replacements may not be able to be matched.
5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood. If there are no other culverts in the neighborhood, the culvert pipe shall be a minimum of 15 inches in diameter and a minimum of 30 feet in length measured from the end of miter to the end of miter. All right-of-way must be restored to its original condition and in accordance to applicable Lake County Codes. All disturbed areas must be sodded, matching existing grass type. Applicant shall be responsible for sod until it is established.
6. Driveway apron slope may not exceed 14%. Variance requests should be submitted to the Lake County Public Works Department. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 2% cross slope) in compliance with ADA requirements.
7. Driveway permit shall expire one (1) year from date approved.
8. Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements

[Signature] 10/23/17
Applicant's Signature/Date