



Residential Driveway Apron Permit Application

(Please Print or Type)

MAY 11 2018

Date: 5/11/18 Bldg Permit No. 2018050566

Applicant/ Name Permit Will Be Returned To: Keuco Builders
 Applicant's Street Address: 2104 S Bay St
 Applicant's City, State, Zip: Eustis FL 32726

Signature of Applicant: [Signature] Phone Number: _____
 Applicant's e-mail address: Joe @ KeucoBuilders.com

Alt. Key# 355252 / Section 25 / Township 19 / Range 702
 House Number / Road Name: 35044 Silver Oak Dr
 Subdivision Name: Silver Oak
 Applicant, Please Print Name: Kevin Burkholder
 Contractor License # (Required unless built by owner): CBC 040737

A driveway permit is required to construct a new driveway, modify an existing driveway to meet county requirements, or install a temporary construction entrance within the public rights-of-way of County maintained roads. Issuance of a driveway permit does not vest any rights to the property owner for zoning, land use changes, or site improvements. The owner must follow all County procedures for permitting.

Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch. Applicant holds Lake County harmless from all damages, claims, or injuries which may result from such work. Any deviation from the attached sketch must first be approved in writing by Lake County Public Works Department. Please see attached minimum requirement details for specifications.

- Check one:**
- Clay Road – No apron required – culvert pipe may be required – sod all disturbed areas.
 - Paved Road – Option 1: 6" limerock base and minimum 1" Type S-III Asphalt. Option 2: 6" reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement. Culvert pipe may be required – Sod all disturbed areas.

In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.

County Road # <u>7902</u>	To be completed by County Staff		
Driveway Permit Fee: \$50.00	Check/Transaction#: <u>534527</u>	Date: <u>6/22/18</u>	Fee Code: PUBSV1
Permit # <u>15974</u>	Maint Area: <u>1</u>	Signed: <u>[Signature]</u>	Date Approved: <u>7-19-18</u>
Permit Shall Expire One (1) Year From Date Approved		Date Expired: <u>7/19/19</u>	
Date of Final Inspection: _____		Inspector: _____	
Comments or special conditions: _____			
<p>The design has been reviewed and upon completion should meet the regulations and requirements as noted on this application. The driveway shall be constructed per approved subdivision plans if applicable. For inspection, call Lake County Building Services Division at 352-343-9634. For joint (Common Split) driveway inspection, call Lake County Public Works Department at 352-253-6019.</p> <p>Submit permit to: <i>Lake County Public Works, Post Office Box 7800, Tavares, FL 32778</i></p>			

Public Works Department
Road Operations Division

Residential Driveway Apron Permit
Effective June 2015

7/13/18
7/13/18
8/8/18
8/8/18
7/13/18



Residential Driveway Apron Permit Application Requirements

2018050566

MAY 11 2018

To be completed by County Staff

- Single Family Driveway (standard A)
Joint Driveway (Common/Split) (standard B)
Driveway apron as Swale Check (standard C)
Piped Driveway apron (standard D)
Driveway apron conforming to Grade or Swale (standard E)
Driveway apron with Miami Curb & Gutter (standard M)
Driveway apron with Standard Curb & Gutter (standard S)

The applicable driveway apron standard will be included with approved permit that is sent to applicant.

- 1. Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 1.5%, 6 inches minimum thickness.
2. To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 323 N. Sinclair Avenue in Tavares.
3. Driveways are not permitted in the radius return of an intersection. Driveway aprons must be 100 feet from the nearest intersecting road and may not exceed 24 feet in width at the edge of the roadway.
4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair.
5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood.
6. Driveway apron slope may not exceed 14%.
7. Driveway permit shall expire one (1) year from date approved.
8. Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements [Signature] 5/11/18
Applicant's Signature/Date

Public Works Department
Road Operations Division


Residential Driveway Apron Permit
Effective June 2015



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

A

RESIDENTIAL DRIVEWAY



* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR


6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

E

RESIDENTIAL DRIVEWAY CONFORMING TO GRADE OR SWALE.



* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR


6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

M

RESIDENTIAL DRIVEWAY WITH DROP "MIAMI" CURB AND GUTTER

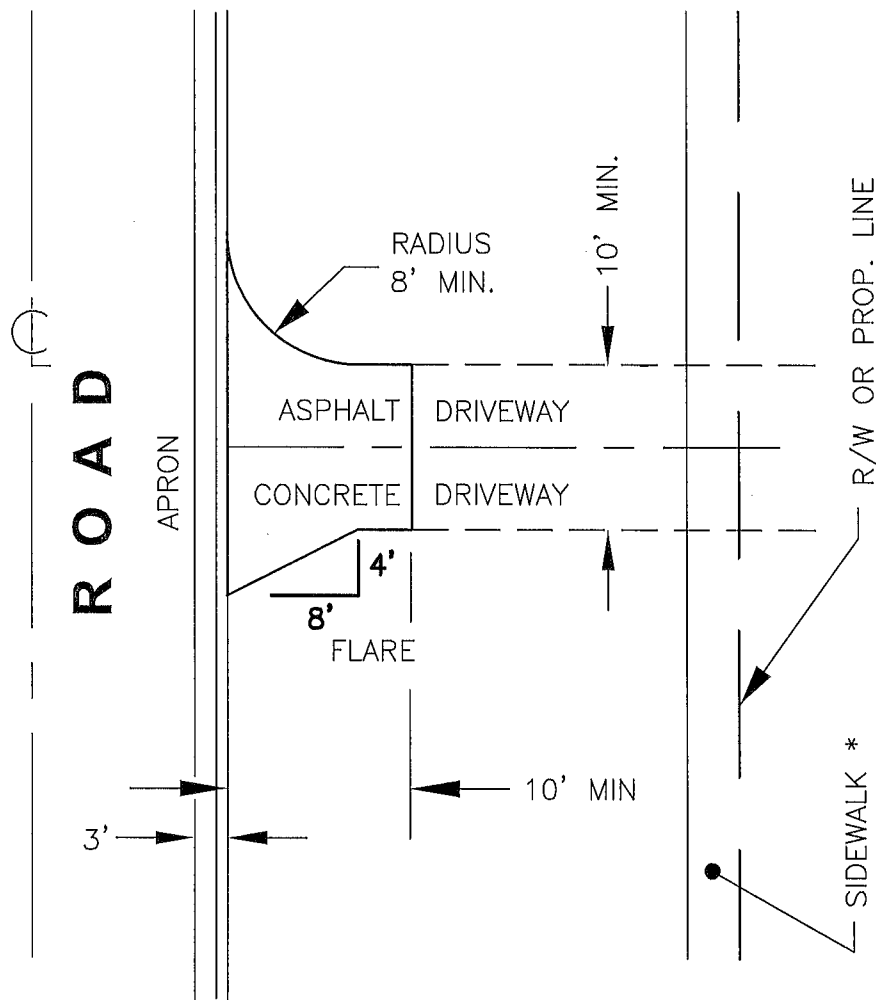

* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR

6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE