

Residential Driveway Apron Permit Application (Please Print or Type)

JUN 2 2 2018 AUG

LAKE COUNTY

0120118

Date: 612010 Bldg Permit No. 118	The state of the s							
Kenneth Smith	3910916, 13, 24, 26							
Applicant/ Name Permit Will Be Returned To:	Alt. Key# Section Township Range							
4901 Vineland Road	17389 Painted Legf Way							
Applicant's Street Address	House Number / Road Name							
Orlando, FL 32811	SERENOA LST 424							
Applicant's City, State, Zip	Subdivision Name							
hunty 407-661-2161	Kenneth Smith							
Signature of Applicant Phone Number	Applicant, Please Print Name							
NFLPermitting@Pulte.com	CGC 1520694							
Applicant's e-mail address	Contractor License # (Required unless built by owner)							
A driveway permit is required to construct a new driveway, modify an existing driveway to meet county requirements, or install a temporary construction entrance within the public rights-of-way of County maintained roads. Issuance of a driveway permit does not vest any rights to the property owner for zoning, land use changes, or site improvements. The owner must follow all County procedures for permitting.								
Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch. Applicant holds Lake County harmless from all damages, claims, or injuries which may result from such work. Any deviation from the attached sketch must first be approved in writing by Lake County Public Works Department. Please see attached minimum requirement details for specifications. Check one: Clay Road — No apron required — culvert pipe may be required — sod all disturbed areas. Paved Road — Option 1: 6" limerock base and minimum 1" Type S-III Asphalt. Option 2: 6"reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement. Culvert pipe may be required — Sod all disturbed areas.								
In areas where sidewalks are present or planned, the dri driveway apron (at a maximum 1.5% cross slope) in compli-	iveway must include a minimum 4 foot wide path traversing the lance with ADA requirements.							
County Road # 0265 To be comp	leted by County Staff							
Driveway Permit Fee: \$50.00 Check/Transaction #:	541782 Date: 7/17/18 Fee Code: PUBSV1							
Permit # Maint Area: Sign	ned: Date Approved:							
Permit Shall Expire One (1) Year From Date Approved	Date Expired:							
Date of Final Inspection: Inspec	ctor:							
Comments or special conditions:								

Public Works Department Road Operations Division

3/7/13 3/1/3 Entered Data One rst Scan dated Data One

and Scan

o Client

Residential Driveway Apron Permit Effective February 2017

JUN 22 2010



Residential Driveway Apron Dermit Application Descripements

	FLORIDA PERMICACION REQUIREM	ents								
	To be completed by County Staff									
	Single Family Driveway (standard A) Joint Driveway (Common/Split) (standard B)	2 0 1 8 0 6 1 0 2 9 Permit Number								
	Driveway apron as Swale Check (standard C) Piped Driveway apron (standard D) Driveway apron conforming to Grade or Swale (standard E)									
☐ Driveway apron with Miami Curb & Gutter (standard M) ☐ Driveway apron with Standard Curb & Gutter (standard S)										
*The	applicable driveway apron standard will be included with approved	permit that is sent to applicant. *								
1.	Sidewalks must be constructed per FDOT Index 310, with maximum inimum thickness. (See detail on attachment).	m cross slope of 1.5%, 6 inches								
2.	To conform to sidewalk requirements, subdivision construction plants	ans are available for review in the								

- Lake County Public Works Department located at 323 N. Sinclair Avenue in Tavares.
- 3. Driveways are not permitted in the radius return of an intersection. With the exception of joint driveways, driveway aprons must be 100 feet from the nearest intersecting road and 10 feet from the nearest property corner. The driveway width at the property line may not exceed 24 feet (10 feet minimum) and shall include either the standard minimum radius of 8 feet or 8 foot long by 4 foot wide flares on either side of the driveway, for a maximum width of 32' at the edge of the roadway. Variance requests should be submitted to the Lake County Public Works Department.
- 4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair. If pavers are removed to facilitate Lake County and/or a utility company to perform utility installation and/or maintenance, the paver(s) used as replacements may not be able to be matched.
- 5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood. If there are no other culverts in the neighborhood, the culvert pipe shall be a minimum of 15 inches in diameter and a minimum of 30 feet in length measured from the end of miter to the end of miter. All right-of-way must be restored to its original condition and in accordance to applicable Lake County Codes. All disturbed areas must be sodded, matching existing grass type. Applicant shall be responsible for sod until it is established.
- Driveway apron slope may not exceed 14%. Variance requests should be submitted to the Lake 6. County Public Works Department. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.
- Driveway permit shall expire one (1) year from date approved. 7.

В.	Driveway Apron Permit A	Application shal	li include a check	made payable	to the Lake	e County	Board o	of
	County Commissioners (BOCC).		, ,	1	/		•

I have read and understand the above requirements

Applicant's Signature/Date

Public Works Department Road Operations Division

Residential Driveway Apron Permit Effective February 2017


PLOT PLAN

2018061029

DESCRIPTION:(AS FURNISHED)

LOT 424, SERENOA VILLAGE 1 PHASE 1A-2

AS RECORDED IN PLAT BOOK 70, PAGE(S) 5-7, OF THE PUBLIC RECORDS OF LAKE COUNTY, FLORIDA.

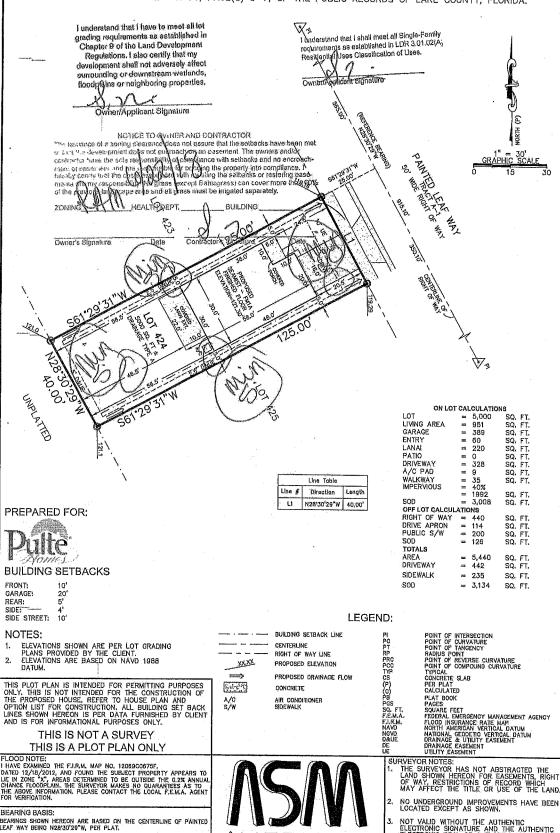

1.

(FIELD DATE:)

SCALE: 1" = 30 FEET

DRAWN BY: KCW

JOB NO. 180615 LOT 424

REVISED:

PLOT PLAN 5/18/18 RME

1ERIC SURVEYING &M APPING INC

CERTIFICATION OF AUTHORIZATION NUMBER LB#6393
3191 MAGUIRE BOULEVARD, SUITE 200
ORLANDO, FLORIDA 32803
(407) 4286–7979
WWW.AMERICANSURVEYINGANOMAPPING.COM

IOT VALID WITHOUT THE AUTHENTIC LECTRONIC SIGNATURE AND THE AUTHENTIC LECTRONIC SEAL OF A FLORIDA LICENSED URVEYOR AND MAPPER,



Digitally signed by Jim Boleman DN: C=US, O=American Surveying & Mapping, CN=Jim Boleman, E=Jboleman@asmcorporate;@ Location: THE Date: 2018-06-18 15:37:18 FIRM

JAMES W. BOLEMAN PSM# 6485