

## Residential Driveway Apron Permit Application (Please Print or Type)

	ECEIVED	
Contract to the Contract to th	Sur ly Ed	Division of the Party and a new or or
PUBLI	AKE COUNTY SWOOKS DEPARTMENT	in However, Server shall not be a
18	24	med

Date: 09/12/18 Bldg Permit No			PUBLIO W	E COUNTY
Dodd McDowell	2718005	,06	,18	,24
Applicant/ Name Permit Will Be Returned To:	Alt. Key#	Section	Township	Range
1020 Lake Sumter Landing	1222 DUS	TIN DR		
Applicant's Street Address	House Number	/ Road Nan	ne	
The Villages, FL 32162	Orange Bl	ossom G	ardens	/
Applicant's City, State, Zip	Subdivision Nar	me		
Dutal Vishwell  Discription State McChowell  Discription State University  3523919669	Dodd McD	owell		
Signature of Applicant Phone Number	Applicant, Plea	se Print Nar	ne	
tracy.waterman@agewavesolutions.com	CGC1507	683		
Applicant's e-mail address	Contractor Lice	ense # (Rec	uired unless	built by owner)
A driveway permit is required to construct a new driveway install a temporary construction entrance within the public permit does not vest any rights to the property owner for follow all County procedures for permitting.	rights-of-way of County zoning, land use chang	y maintained Jes, or site in	roads. Issuan nprovements.	ce of a driveway The owner must
Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch. Applicant holds Lake County harmless from all damages, claims, or injuries which may result from such work. Any deviation from the attached sketch must first be approved in writing by Lake County Public Works Department. Please see attached minimum requirement details for specifications.  Check one:  Clay Road – No apron required – culvert pipe may be required – sod all disturbed areas.  Paved Road – Option 1: 6" limerock base and minimum 1" Type S-III Asphalt. Option 2: 6"reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement. Culvert pipe may be required – Sod all disturbed areas.				
In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.				
County Road # 7903 To be comp	oleted by County Sta	<u>ıff</u>		
Driveway Permit Fee: \$50.00 Check/Transaction #:	Cred! t Cura Date:	9/27/18	Fee C	Code: PUBSV1
Permit #				
Permit Shall Expire One (1) Year From Date Approved Date Expired:				
Date of Final Inspection: Inspector:				
Comments or special conditions:				
The design has been reviewed and upon completion should meet the regulations and requirements as noted on this application. The driveway shall be constructed per approved subdivision plans if applicable. For inspection of a driveway associated with a building permit, call Lake County Building Services Division at 352-343-9634. For inspection of a joint (Common Split) driveway or a driveway not associated with a building permit, call Lake County Public Works Department at 352-253-6019. Submit permit to: Lake County Public Works, Post Office Box 7800, Tavares, FL 32778				

Public Works Department Road Operations Division

		9/37/18
	,	1/0/10
	Oll	14 - 15 - 15 - 15 - 15 - 15 - 15 - 15 -
111		

Residential Driveway Apron Permit Effective February 2017



## Residential Driveway Apron Permit Application Requirements

To be completed by County Staff			
<ul><li>Single Family Driveway (standard A)</li><li>Joint Driveway (Common/Split) (standard B)</li></ul>	Permit Number		
<ul> <li>Driveway apron as Swale Check (standard C)</li> <li>Piped Driveway apron (standard D)</li> <li>Driveway apron conforming to Grade or Swale (standard E)</li> </ul>			
<ul><li>Driveway apron with Miami Curb &amp; Gutter (standard M)</li><li>Driveway apron with Standard Curb &amp; Gutter (standard S)</li></ul>			
*The applicable driveway apron standard will be included with approved pe	rmit that is sent to applicant. *		

- 1. Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 1.5%, 6 inches minimum thickness. (See detail on attachment).
- 2. To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 323 N. Sinclair Avenue in Tavares.
- 3. Driveways are not permitted in the radius return of an intersection. With the exception of joint driveways, driveway aprons must be 100 feet from the nearest intersecting road and 10 feet from the nearest property corner. The driveway width at the property line may not exceed 24 feet (10 feet minimum) and shall include either the standard minimum radius of 8 feet or 8 foot long by 4 foot wide flares on either side of the driveway, for a maximum width of 32' at the edge of the roadway. Variance requests should be submitted to the Lake County Public Works Department.
- 4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair. If pavers are removed to facilitate Lake County and/or a utility company to perform utility installation and/or maintenance, the paver(s) used as replacements may not be able to be matched.
- 5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood. If there are no other culverts in the neighborhood, the culvert pipe shall be a minimum of 15 inches in diameter and a minimum of 30 feet in length measured from the end of miter to the end of miter. All right-of-way must be restored to its original condition and in accordance to applicable Lake County Codes. All disturbed areas must be sodded, matching existing grass type. Applicant shall be responsible for sod until it is established.
- 6. Driveway apron slope may not exceed 14%. Variance requests should be submitted to the Lake County Public Works Department. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.
- 7. Driveway permit shall expire one (1) year from date approved.
- 8. Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements


Orda Historical

Digitally signed by Dodd McDowell
Dix cn=Dodd McDowell, o=McDowell Construction,
ou, email=dodd.mcdowell@theyillages.com, c=US
Date: 2016,09,12 08:44:59 -04'00'

Applicant's Signature/Date

Public Works Department Road Operations Division Residential Driveway Apron Permit Effective February 2017



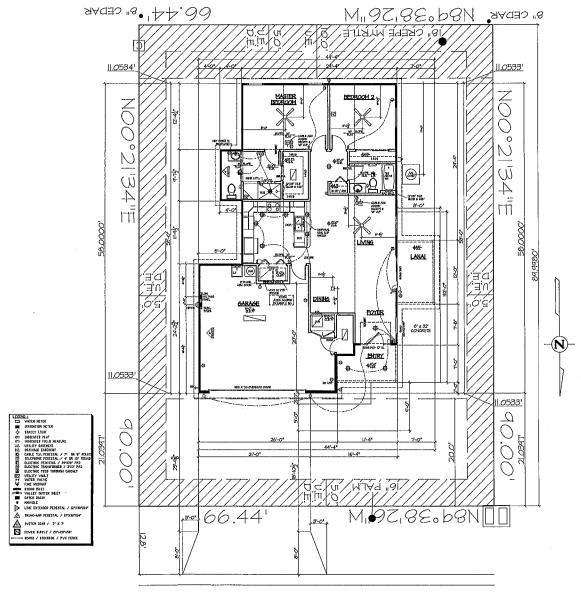

1222 DUSTIN DR

TOTAL IMPER	VIOUS AREA	
TOTAL LOT AREA		5946
TOTAL COVERED AREA		2712
PERCENT COVERED		45,6%
	COVERED AREA CAL (MITHIN PROPERTY L	
NOTE:	HOME AREA	1995
LOT SQUARE FOOTAGE	DRIVEWAY AREA	443
TAKEN FROM-	SIDEWALK AREA	102
LAKE COUNTY PROPERTY	PATIO/PAD AREA	172
APPRAISER'S OFFICE	SCREEN ENCL AREA	0
HTTP://WWW.LAKECOPROPAPPR.COM/	TOTAL COVERED AREA	2112

TOTAL CONG. SQ FTG. IN EASEMENT: 292 SQ. FT

The Villages	
THE VILLAGES IS A REGISTERED TRADEWORK OF HOLDING COMPANY OF THE VILLAGES IN ALL INDIFFS RESERVED.	13

PATIO SERIES	SCALE: 1/8"=1"-0"		
RUBY	DRAWN BY: BB		
	CHECKED BY: MAB/JF		
UNIT & LOT	SAVE DATE; 8/1/2018 10:04:55 AM		
3-306	PLOT DATE: 9//2018 10:44:08 AM		
STREET: 1222 DUSTIN DRIVE			

REVISIONS			
DATE	DATE PAGES DESCRIPTION		
		**	

AREA CALCULAT	rions	BUILDING OFFICIAL
TYPE	AREA	
-CLIMATE CONTROLLED	1281 SF	i
-GARAGE	577 SF	ŀ
-COVERED AREA	84 SF	
COVERED ENTRY	73 SF	1
	1995 SF	



SITE PLAN

09/27/2018

RECEIPT **LAKE COUNTY BOCC** 315 W MAIN ST Tavares, FL 32778 Phone

Transaction Type: Sale

Comment:

## **Merchant-Defined Data Fields**

Merchant-Defined Data Field 1: Residential Driveway Apron Permits (2)

Department: Public Works

Merchant-Defined Data Field 3: 5056260.341213

Total: 101.00 USD

## **Cardholder Information**

Name Randall Thompson

Credit Card Type: MasterCard

Credit Card Number: ##########1211

Company: Agewave Solutions, Inc.

Phone: 3523919669
Email: tracy.waterman@agewavesolutions.com

10F2