

Residential Driveway Apron Permit Application

(Please Print or Type)

Date: 09/21/2018 Bldg Permit No. _____ Dodd McDowell 1483565 ,06 18 Applicant/ Name Permit Will Be Returned To: Alt. Kev# Range Section Township 1020 Lake Sumter Landing 904 SILVER OAK AVE LADY LAKE FL 32159 Applicant's Street Address House Number / Road Name The Villages, FL 32162 Orange Blossom Gardens Applicant's City, State, Zip Subdivision Name Digitally signed by Dodd McDowell DN: cn=Dodd McDowell, o=McDowell Ordd uspoull Dodd McDowell 3523919669 email -dodd.mcdowell@thevillages.com, c=US Date: 2018.09.21 14:34:34 -04:00' Signature of Applicant Applicant, Please Print Name Phone Number CGC1507683 tracy.waterman@agewavesolutions.com Applicant's e-mail address Contractor License # (Required unless built by owner) A driveway permit is required to construct a new driveway, modify an existing driveway to meet county requirements, or install a temporary construction entrance within the public rights-of-way of County maintained roads. Issuance of a driveway permit does not vest any rights to the property owner for zoning, land use changes, or site improvements. The owner must follow all County procedures for permitting. Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch. Applicant holds Lake County harmless from all damages, claims, or injuries which may result from such work. Any deviation from the attached sketch must first be approved in writing by Lake County Public Works Department. Please see attached minimum requirement details for specifications. Check one: Clay Road – No apron required – culvert pipe may be required – sod all disturbed areas. ☐ Paved Road - Option 1: 6" limerock base and minimum 1" Type S-III Asphalt. Option 2: 6"reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement. Culvert pipe may be required - Sod all disturbed areas. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements. County Road # 7002 To be completed by County Staff Driveway Permit Fee: \$50.00 Check/Transaction #: Credt Wd Date: 10/1/18 Fee Code: PUBSV1 Permit Shall Expire One (1) Year From Date Approved Date Expired: Date of Final Inspection: _____ Inspector: _____ Comments or special conditions: The design has been reviewed and upon completion should meet the regulations and requirements as noted on this application. The driveway shall be constructed per approved subdivision plans if applicable. For inspection of a driveway associated with a building permit, call Lake County Building Services Division at 352-343-9634. For inspection of a joint (Common Split) driveway or a driveway not associated with a building permit, call Lake County Public Works Department at 352-253-6019. Submit permit to: Lake County Public Works, Post Office Box 7800, Tavares, FL 32778 Public Works Department Residential Driveway Apron Permit cred Data One Road Operations Division Effective February 2017

dated Data One _

cond Scan " med to Client



Residential Driveway Apron Permit Application Requirements

To be completed by County Staff	
Single Family Driveway (standard A)Joint Driveway (Common/Split) (standard B)	Permit Number
 Driveway apron as Swale Check (standard C) Piped Driveway apron (standard D) Driveway apron conforming to Grade or Swale (standard E) 	
☐ Driveway apron with Miami Curb & Gutter (standard M)☐ Driveway apron with Standard Curb & Gutter (standard S)	
*The applicable driveway apron standard will be included with approved pe	rmit that is sent to applicant. *

- 1. Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 1.5%, 6 inches minimum thickness. (See detail on attachment).
- 2. To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 323 N. Sinclair Avenue in Tavares.
- 3. Driveways are not permitted in the radius return of an intersection. With the exception of joint driveways, driveway aprons must be 100 feet from the nearest intersecting road and 10 feet from the nearest property corner. The driveway width at the property line may not exceed 24 feet (10 feet minimum) and shall include either the standard minimum radius of 8 feet or 8 foot long by 4 foot wide flares on either side of the driveway, for a maximum width of 32' at the edge of the roadway. Variance requests should be submitted to the Lake County Public Works Department.
- 4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair. If pavers are removed to facilitate Lake County and/or a utility company to perform utility installation and/or maintenance, the paver(s) used as replacements may not be able to be matched.
- 5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood. If there are no other culverts in the neighborhood, the culvert pipe shall be a minimum of 15 inches in diameter and a minimum of 30 feet in length measured from the end of miter to the end of miter. All right-of-way must be restored to its original condition and in accordance to applicable Lake County Codes. All disturbed areas must be sodded, matching existing grass type. Applicant shall be responsible for sod until it is established.
- 6. Driveway apron slope may not exceed 14%. Variance requests should be submitted to the Lake County Public Works Department. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.
- 7. Driveway permit shall expire one (1) year from date approved.
- 8. Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements

Ordd Hybriell

Digitally signed by Dodd McDowell , DN: cn=Dodd McDowell, o=McDowell Construction, juj_email=dodd.mcdowell@thevillages.com, c=US Date: 2018.09.21 14:34:49 -04'00'

Applicant's Signature/Date

Public Works Department Road Operations Division Residential Driveway Apron Permit Effective February 2017

10/01/2018

RECEIPT LAKE COUNTY BOCC 315 W MAIN ST Tavares, FL 32778 Phone

Transaction Type: Sale

Comment:

Merchant-Defined Data Fields

Merchant-Defined Data Field 1: Residential Driveway Apron Permit **Department:** Public Works

Merchant-Defined Data Field 3: 5056260,341213

Total: 50.50 USD

Cardholder Information


Name Randall Thompson Credit Card Type: MasterCard

Credit Card Number: ##########1211

Company: Agewave Solutions, Inc. **Phone:** 3523919669

Email: tracy.waterman@agewavesolutions.com



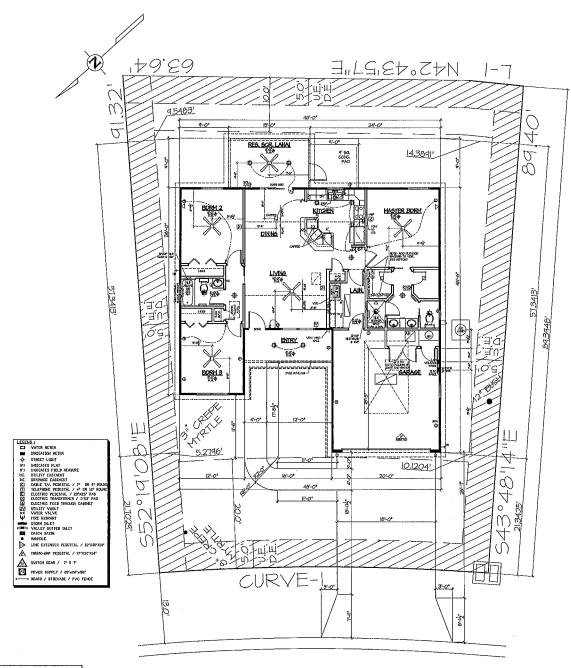

TOTAL IMPERVIOUS AREA LOT BOUARE FOOTAGE TAKEN FROM-TAKEN FROMLARE COUNTY PROPERTY
APPRAISER'S OFFICE
APPRAISER'S OFFICE
HITP://WYWILAKECOPROPAPPRACOW/
TOTAL COUNC. SQ FTG. IN EASEMENT. 257
SQ. FT 904 SILVER OAK AVE

The Villages
THE PARTY OF THE P
THE VILLAGES IS A REGISTERED TRACEWARK OF HOLDING COMPANY OF THE VILLAGES INC. ALL RIGHTS RESERVED.

íoc.	BOUG
50	UN
DOMPANY OF	
	STREET;

ESIGNER SERIES	SCAL
OUGAINVILLEA 5	DRAW
	CHEC
UNIT & LOT	SAVE
3-37	PLOT

SERIES	SCALE: 1/8"=1'-0"	
ILLEA 6	DRAWN BY: BB/TT	
	CHECKED BY: RRVCL	
LOT	SAVE DATE: 8/18/2018 4:84:18 PM	
	PLOT DATE: 8/20/2018 11:28:38 AM	
904 SILVE	R OAK AVE	

REVISIONS		
DATE	PAGES	DESCRIPTION

AREA CALCULAT	TIONS
YPE	AREA
CLIMATE CONTROLLED	1392 SF
GARAGE	450 SF
LANAI	135 &F
ENTRY	96 SF
	2073 SF

BUILDING OFFICIAL



SITE PLAN 1 OF 9