

# Residential Driveway Apron Permit Application (Please Print or Type)

B F	Land No.	Morra		C. 6.	U. 10
JUL	4	7	9	n	40
JUL	. 1	1	4	U	18

Date: $\frac{7/16/18}{}$ Bldg Permit No. $\frac{2018}{}$	070667 LAKE COLPUTA					
Kenneth Smith	3910891, 13, 24, 26					
Applicant/ Name Permit Will Be Returned To:	Alt. Key# Section Township Range					
4901 Vineland Road	17388 Painted Leaf Way					
Applicant's Street Address	House Number / Road Name					
Orlando, FL 32811	SERENOA , Lot 359					
Applicant's City, State, Zip	Subdivision Name					
Lutty \$ 407-661-2161	Kenneth Smith					
Signature of Applicant Phone Number	Applicant, Please Print Name					
NFLPermitting@Pulte.com	CGC 1520694					
Applicant's e-mail address	Contractor License # (Required unless built by owner)					
install a temporary construction entrance within the public right	modify an existing driveway to meet county requirements, or its-of-way of County maintained roads. Issuance of a driveway ing, land use changes, or site improvements. The owner must					
attached sketch. Applicant holds Lake County harmless from work. Any deviation from the attached sketch must first be Please see attached minimum requirement details for specifical <b>Check one:</b>						
☐ Clay Road — No apron required — culvert pipe may b ☐ Paved Road — Option 1: 6" limerock base and mi	ne required – sod all disturbed areas.  inimum 1" Type S-III Asphalt. Option 2: 6"reinforced					
concrete (3000 PSI) using 10 foot square of 6" x 6" wi	re mesh placed a minimum of 10' from edge of existing					
pavement. Culvert pipe may be required – Sod all disturbed areas.						
In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.						
County Road # 0265 To be complete	ed by County Staff					
Driveway Permit Fee: \$50.00 Check/Transaction #: 54	14/88 Date: 8/13/18 Fee Code: PUBSV1					
Permit #/6073	: Date Approved:					
Permit Shall Expire One (1) Year From Date Approved	Date Expired:					
Date of Final Inspection: Inspector	:					
Comments or special conditions:						
The design has been reviewed and upon completion should meet the regulations and requirements as noted on this application. The driveway shall be constructed per approved subdivision plans if applicable. For inspection of a driveway associated with a building permit, call Lake County Building Services Division at 352-343-9634. For inspection of a joint (Common Split) driveway or a driveway not associated with a building permit, call Lake County Public Works Department at 352-253-6019. Submit permit to: Lake County Public Works, Post Office Box 7800, Tavares, FL 32778						
Public Works Department Road Operations Division  Road Operations Division  Road Data One	Residential Driveway Apron Permit  8/22/18  Effective February 2017  8/22/18					

rond Scan

rond Scan



## Residential Driveway Apron Permit Application Requirements

To be completed by County Staff				
☐ Single Family Driveway (standard A) ☐ Joint Driveway (Common/Split) (standard B)	$\frac{2018070667}{\text{Permit Number}}$			
<ul> <li>□ Driveway apron as Swale Check (standard C)</li> <li>□ Piped Driveway apron (standard D)</li> <li>□ Driveway apron conforming to Grade or Swale (standard E)</li> </ul>				
☐ Driveway apron with Miami Curb & Gutter (standard M) ☐ Driveway apron with Standard Curb & Gutter (standard S)				
*The applicable driveway apron standard will be included with approved permit that is sent to applicant. *				

- Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 1.5%; 6 inches minimum thickness. (See detail on attachment).
- 2. To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 323 N. Sinclair Avenue in Tavares.
- 3. Driveways are not permitted in the radius return of an intersection. With the exception of joint driveways, driveway aprons must be 100 feet from the nearest intersecting road and 10 feet from the nearest property corner. The driveway width at the property line may not exceed 24 feet (10 feet minimum) and shall include either the standard minimum radius of 8 feet or 8 foot long by 4 foot wide flares on either side of the driveway, for a maximum width of 32' at the edge of the roadway. Variance requests should be submitted to the Lake County Public Works Department.
- 4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair. If pavers are removed to facilitate Lake County and/or a utility company to perform utility installation and/or maintenance, the paver(s) used as replacements may not be able to be matched.
- 5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood. If there are no other culverts in the neighborhood, the culvert pipe shall be a minimum of 15 inches in diameter and a minimum of 30 feet in length measured from the end of miter to the end of miter. All right-of-way must be restored to its original condition and in accordance to applicable Lake County Codes. All disturbed areas must be sodded, matching existing grass type. Applicant shall be responsible for sod until it is established.
- 6. Driveway apron slope may not exceed 14%. Variance requests should be submitted to the Lake County Public Works Department. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.
- 7. Driveway permit shall expire one (1) year from date approved.

8. Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements

Applicant's Signature/Date

Public Works Department Road Operations Division


Residential Driveway Apron Permit Effective February 2017

### PLOT PLAN

DESCRIPTION:(AS FURNISHED)

LOT 359, SERENOA VILLAGE 1 PHASE 1A-2 ::

BOOK 70, PAGE(S) 5-7, OF THE PUBLIC RECORDS OF LAKE COUNTY, FLORIDA.

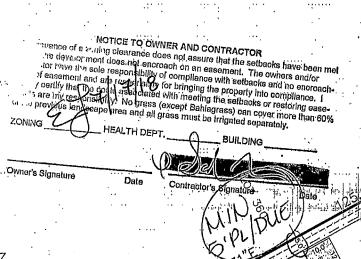

I understand that I have to meet all lot grading requirements as established in Chapter 9 of the Land Development Regulations, I also certify that my development shall not adversely affect surrounding or downstream wetlands, floodplains or neighboring properties.

Owner/Applicant Signature

Line Table Direction N28'30'29"W 40,00

I understand that I shall meet all Single-Family requirements as established in LDR 3.01.02(A)
Residental Uses Classification of Uses.



SQ. FT. SQ. FT. SQ. FT. SQ. FT. GARAGE 60. SQ. FT. SQ. FT. SQ. FT. PATIO = 1892 = 3,108 SQ. FT. SOD SQ. FT. OFF LOT CALCULATIONS RIGHT OF WAY DRIVE APRON = 440 = 114 SQ. FT. SQ. FT. PUBLIC S/W 200 SOD 126 TOTALS AREA DRIVEWAY = 442 SQ. FT. SIDEWALK SQ. FT. = 235

ON LOT CALCULATIONS

**= 5,000** 

#### : LEGEND:

FRONT: .

GARAGE:... REAR:

PREPARED FOR:

BUILDING SETBACKS

ÉLEVATIONS SHOWN ARE PER LOT GRADING PLANS PROVIDED BY THE CLIENT. ÉLEVATIONS ARE BASED ON NAVD 1988

THIS PLOT PLAN IS INTENDED FOR PERMITTING PURPOSES ONLY. THIS IS NOT INTENDED FOR THE CONSTRUCTION OF THE PROPOSED HOUSE, REFER TO HOUSE PLAN AND OPTION, LIST FOR CONSTRUCTION, ALL BUILDING, SET, BÁCK, LINES SHOWN HEREON IS PER DATA FURNISHED BY CLIENT-AND IS FOR INFORMATIONAL PURPOSES ONLY.

THIS IS NOT A SURVEY

111	10	0 14	<i>,</i> ,		01(01		
THIS IS A PLOT PLAN ONLY							
						_	
FLOOD NOTE:			٠.		'; '		
HAVE EXAMINED	THE	F.LR.M.	MAP	NO.	12069C0675F		
						_	



POINT OF INTERSECTION
POINT OF CURVATURE
POINT OF TANGENCY
POINT OF RANGENCY
POINT OF REVERSE CURVATURE
POINT OF COMPOUND CURVATURE
TYPICAL
CONCRETE SLAB
PER PLAT
CALCULATED
PLAT BOOK

SURVEYOR NOTES:
1. THE SURVEYOR HAS NOT ABSTRACTED THE