SafeAccess
A SAFE SCHOOLS TRANSPORTATION STUDY

Mascotte Charter Elementary School

Priority Project #4

Install Barrier Between Bus Loop Entrance and Exit

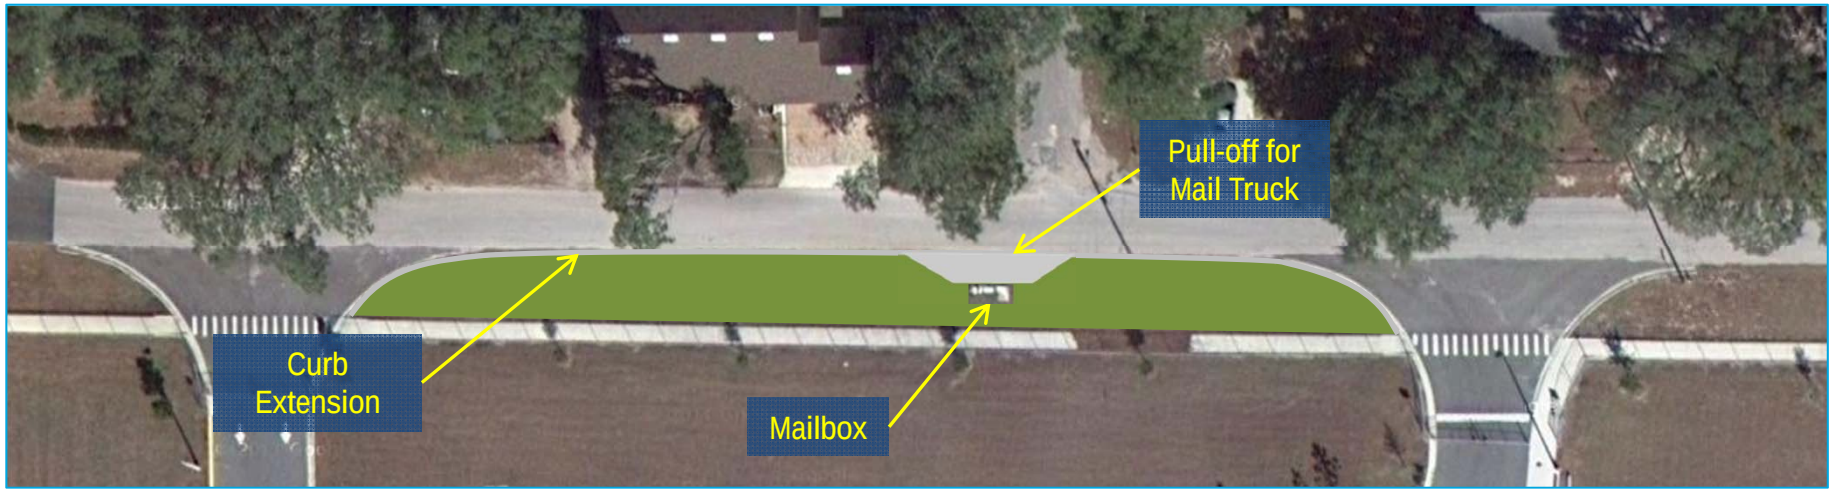

Findings:

- ✓ School staff mentioned adjacent home owners have complained about remote pick-up / drop-off
- ✓ Pavement is deteriorated along edge from poor drainage and remote pick-up / drop-off

Recommendations:

- ✓ Short-term: Plant shrubs or chain off grass leaving an opening for the mail truck to discourage remote pick-up / drop-off
- ✓ Long-term: Extend curbing between bus loop ramps to discourage use of the grass for remote pick-up / drop-off