



Residential Driveway Apron Permit Application (Please Print or Type)



Date: 4-17-17 Bldg Permit No. 2017040699

Laura Barkman for DR Horton

3905837 / 10 / 24 / 28

Applicant/ Name Permit Will Be Returned To:

Alt. Key# Section Township Range

6200 Leevista Blvd

3665 Maidenlain St.

Applicant's Street Address

House Number / Road Name

Orlando, FL 32822

Sawgrass Bay / 365

Applicant's City, State, Zip

Subdivision Name

Laura E Barkman 4079564739

Laura Barkman

Signature of Applicant Phone Number

Applicant, Please Print Name

lebarkman@drhorton.com

CBC1252212

Applicant's e-mail address

Contractor License # (Required unless built by owner)

A driveway permit is required to construct a new driveway, modify an existing driveway to meet county requirements, or install a temporary construction entrance within the public rights-of-way of County maintained roads.

Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch.

Check one:

- Clay Road - No apron required - culvert pipe may be required - sod all disturbed areas.
Paved Road - Option 1: 6" limestone base and minimum 1" Type S-III Asphalt. Option 2: 6" reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement.

In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.

County Road # 0360 To be completed by County Staff
Driveway Permit Fee: \$50.00 Check/Transaction #: 504414 Date: 5/1/17 Fee Code: PUBSV1
Permit # 15606 Maint Area: 2 Signed: [Signature] Date Approved: 5-23-17
Permit Shall Expire One (1) Year From Date Approved Date Expired: 5/23/18
Date of Final Inspection: Inspector:
Comments or special conditions:

The design has been reviewed and upon completion should meet the regulations and requirements as noted on this application. The driveway shall be constructed per approved subdivision plans if applicable.

Submit permit to: Lake County Public Works, Post Office Box 7800, Tavares, FL 32778

Public Works Department Road Operations Division

Data One 5/18/17
Scan 5/18/17
Data One 10/6/17
Scan 6/1/17
to Client 6/1/17

Residential Driveway Apron Permit Effective June 2015

2017040699 APR 20 2017



Residential Driveway Apron Permit Application Requirements

To be completed by County Staff

2017040699
Permit Number

- Single Family Driveway (standard A)
- Joint Driveway (Common/Split) (standard B)
- Driveway apron as Swale Check (standard C)
- Piped Driveway apron (standard D)
- Driveway apron conforming to Grade or Swale (standard E)
- Driveway apron with Miami Curb & Gutter (standard M)
- Driveway apron with Standard Curb & Gutter (standard S)

*The applicable driveway apron standard will be included with approved permit that is sent to applicant. *

1. Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 1.5%, 6 inches minimum thickness. (See detail on attachment).
2. To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 323 N. Sinclair Avenue in Tavares.
3. Driveways are not permitted in the radius return of an intersection. Driveway aprons must be 100 feet from the nearest intersecting road and may not exceed 24 feet in width at the edge of the roadway. Variance requests should be submitted to the Lake County Public Works Department.
4. Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair. If pavers are removed to facilitate Lake County and/or a utility company to perform utility installation and/or maintenance, the paver(s) used as replacements may not be able to be matched.
5. If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood. If there are no other culverts in the neighborhood, the culvert pipe shall be a minimum of 15 inches in diameter and a minimum of 30 feet in length measured from the end of miter to the end of miter. All right-of-way must be restored to its original condition and in accordance to applicable Lake County Codes. All disturbed areas must be sodded, matching existing grass type. Applicant shall be responsible for sod until it is established.
6. Driveway apron slope may not exceed 14%. Variance requests should be submitted to the Lake County Public Works Department. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.
7. Driveway permit shall expire one (1) year from date approved.
8. Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements

Laura E Barkman

Digitally signed by Laura E Barkman
DN: c=US, o=County of Lake County, ou=Public Works, ou=Central Files, ou=Laura E Barkman, email=Laura.E.Barkman@co.lake.fl.us
Date: 2017.04.07 09:21:00 -0400

Applicant's Signature/Date

Public Works Department
Road Operations Division


Residential Driveway Apron Permit
Effective June 2015



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

A

RESIDENTIAL DRIVEWAY

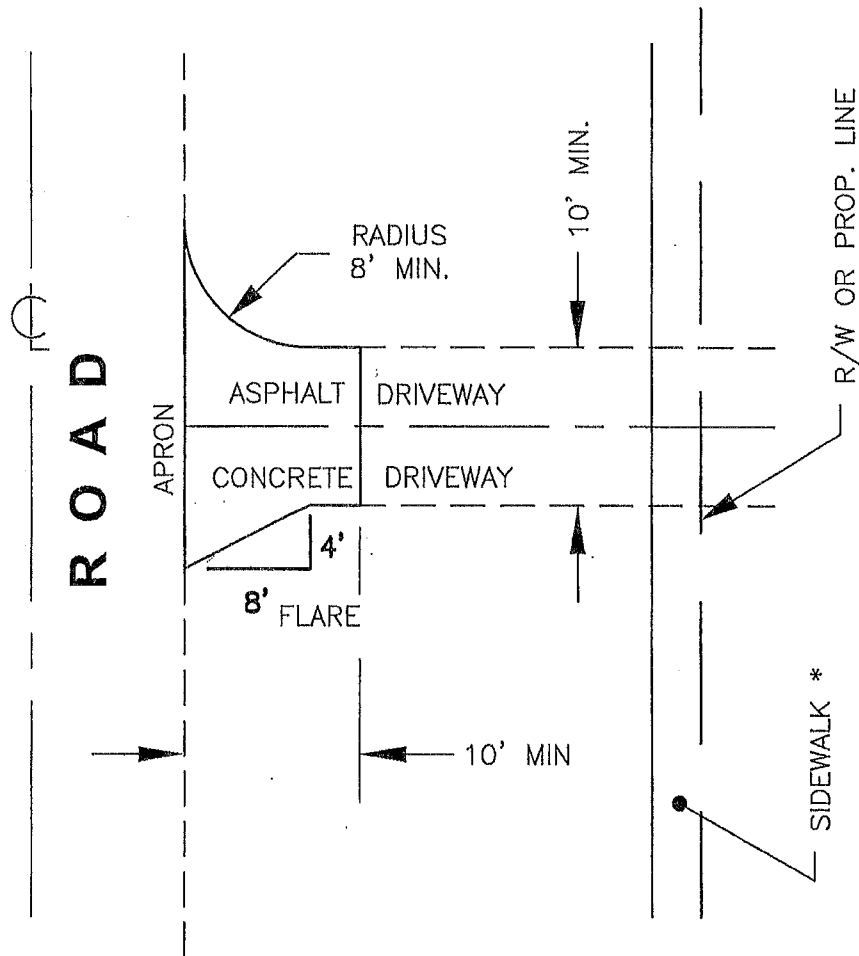

* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR


6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

E

RESIDENTIAL DRIVEWAY CONFORMING
TO GRADE OR SWALE.

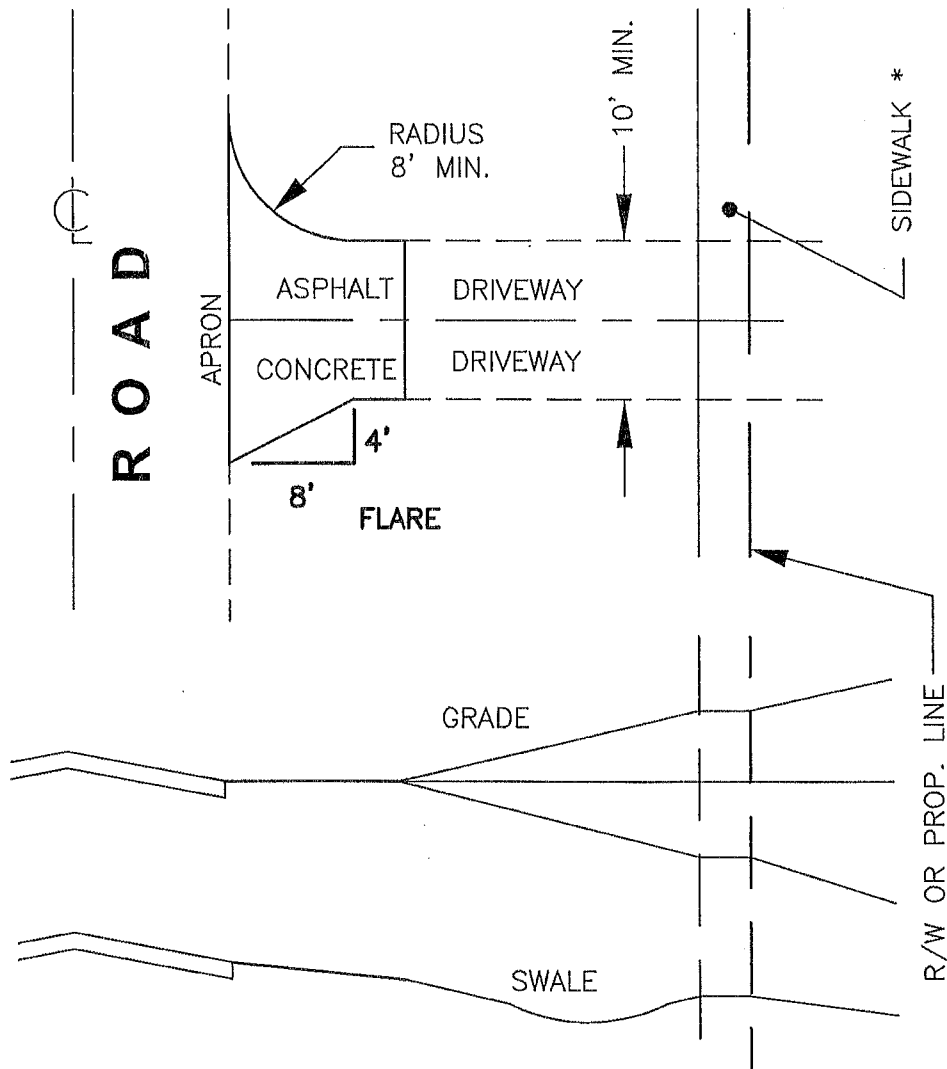

* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FOOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR


6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

M

RESIDENTIAL DRIVEWAY WITH DROP "MIAMI" CURB AND GUTTER

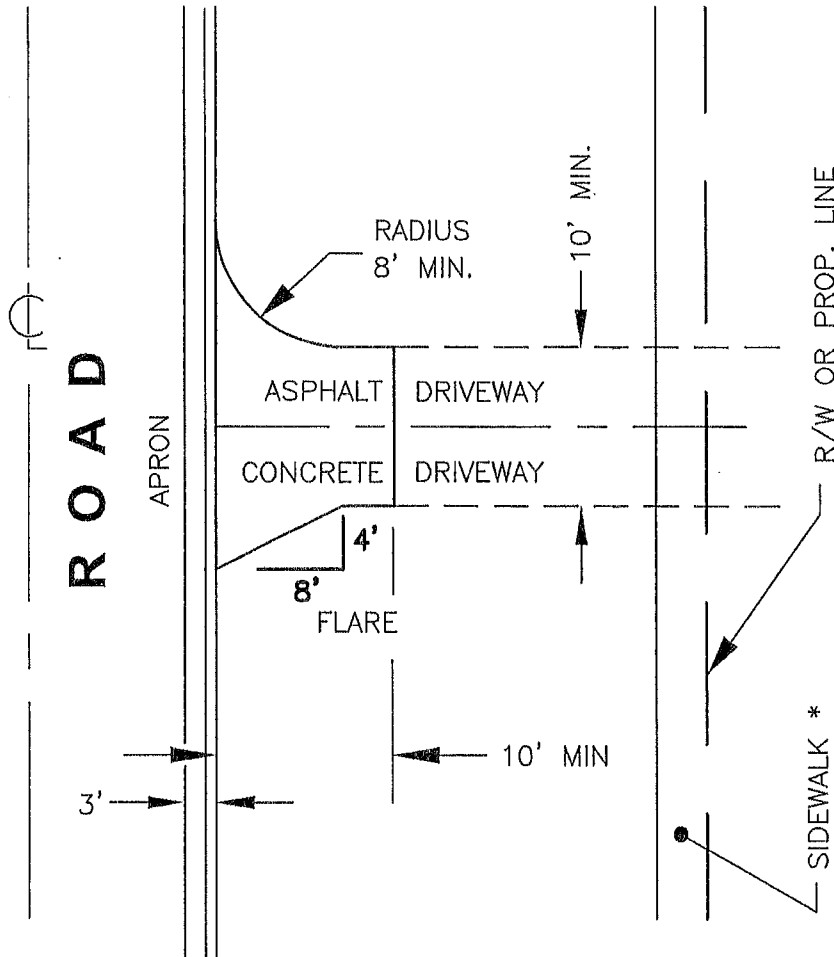

* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR

6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE