



LAKE COUNTY FLORIDA

Residential Driveway Apron Permit Application (Please Print or Type)

2017090631ED 2017090631 PUB SEP 25 2017

Date: 4/4/17

Bldg Permit No.

Maronda Homes

3864684 /36 /19 /17 Alt. Key# Section Township Range

Name Permit Will Be Returned To:

23549 Sahlow Avenue

3999 West First Street

House Number / Road Name

Street Address

Plymouth Creek / Lot 24

Sanford, FL 32771

Subdivision Name

City, State, Zip

George Friedman

407-302-9871

Applicant, Please Print Name

Signature Of Applicant Phone Number

CRC035291

McDonough@maronda.com

Applicant's e-mail address

Contractor License # (Required unless built by owner)

A driveway permit is required to construct a new driveway, modify an existing driveway to meet county requirements, or install a temporary construction entrance within the public rights-of-way of County maintained roads.

Driveway must be constructed in accordance with the Lake County Land Development Regulations and as shown on the attached sketch.

Check one:

- Clay Road - No apron required - culvert pipe may be required - sod all disturbed areas.
Paved Road - Option 1: 6" Ilmerock base and minimum 1" Type S-III Asphalt. Option 2: 6" reinforced concrete (3000 PSI) using 10 foot square of 6" x 6" wire mesh placed a minimum of 10' from edge of existing pavement.

In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.

County Road # 3785B To be completed by County Staff
Driveway Permit Fee: \$50.00 Check/Transaction #: 518654 Date: 11/6/17 Fee Code: PUBSVL
Permit # 15763 Maint Area: 3 Signed: [Signature] Date Approved: 2/5/18
Permit Shall Expire One (1) Year From Date Approved Date Expired: 3/5/19
Date of Final Inspection: Inspector:
Comments or special conditions:

Public Works Department Road Operations Division

Checked by: 6/28/18
Checked by: 6/29/18
Checked by: 7/2/18
Checked by: 7/2/18
Checked by: 7/2/18

Residential Driveway Apron Permit Effective February 2015

JUL 05 2018



**Residential Driveway Apron
Permit Application Requirements**

To be completed by County Staff

- | | |
|--|----------------------|
| <input checked="" type="checkbox"/> Single Family Driveway (standard A) | |
| <input type="checkbox"/> Joint Driveway (Common/Spilt) (standard B) | <u>Permit Number</u> |
| <input type="checkbox"/> Driveway apron as Swale Check (standard C) | |
| <input type="checkbox"/> Piped Driveway apron (standard D) | |
| <input checked="" type="checkbox"/> Driveway apron conforming to Grade or Swale (standard E) | |
| <input type="checkbox"/> Driveway apron with Miami Curb & Gutter (standard M) | |
| <input checked="" type="checkbox"/> Driveway apron with Standard Curb & Gutter (standard S) | |

The applicable driveway apron standard will be included with approved permit that is sent to applicant.

- Sidewalks must be constructed per FDOT Index 310, with maximum cross slope of 1.5%, 6 inches minimum thickness. (See detail on attachment).
- To conform to sidewalk requirements, subdivision construction plans are available for review in the Lake County Public Works Department located at 437 Ardice Avenue in Eustis.
- Driveways are not permitted in the radius return of an intersection. Driveway aprons must be 100 feet from the nearest intersecting road and may not exceed 24 feet in width at the edge of the roadway. Variance requests should be submitted to the Lake County Public Works Department.
- Pavers installed as a driveway apron are the resident's responsibility to maintain, replace and/or repair. If pavers are removed to facilitate Lake County and/or a utility company to perform utility installation and/or maintenance, the paver(s) used as replacements may not be able to be matched.
- If a culvert pipe is required, it shall be the same diameter of existing culverts in neighborhood. If there are no other culverts in the neighborhood, the culvert pipe shall be a minimum of 15 inches in diameter and a minimum of 30 feet in length measured from the end of miter to the end of miter. All right-of-way must be restored to its original condition and in accordance to applicable Lake County Codes. All disturbed areas must be sodded, matching existing grass type. Applicant shall be responsible for sod until it is established.
- Driveway apron slope may not exceed 1.4%. Variance requests should be submitted to the Lake County Public Works Department. In areas where sidewalks are present or planned, the driveway must include a minimum 4 foot wide path traversing the driveway apron (at a maximum 1.5% cross slope) in compliance with ADA requirements.
- Driveway permit shall expire one (1) year from date approved.
- Driveway Apron Permit Application shall include a check made payable to the Lake County Board of County Commissioners (BOCC).

I have read and understand the above requirements


Applicant's Signature/Date


7-12-17



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

A

RESIDENTIAL DRIVEWAY

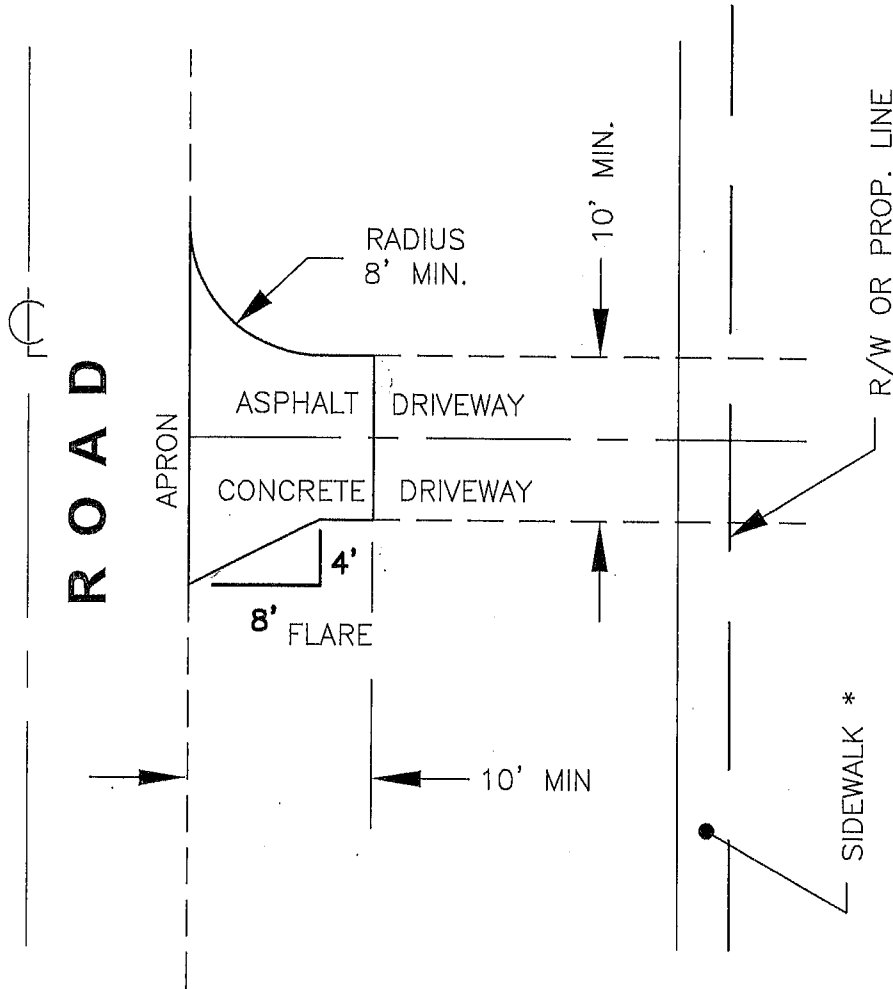

* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR


6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE



DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
437 ARDICE AVE.
EUSTIS, FLORIDA 32726

E

RESIDENTIAL DRIVEWAY CONFORMING TO GRADE OR SWALE.

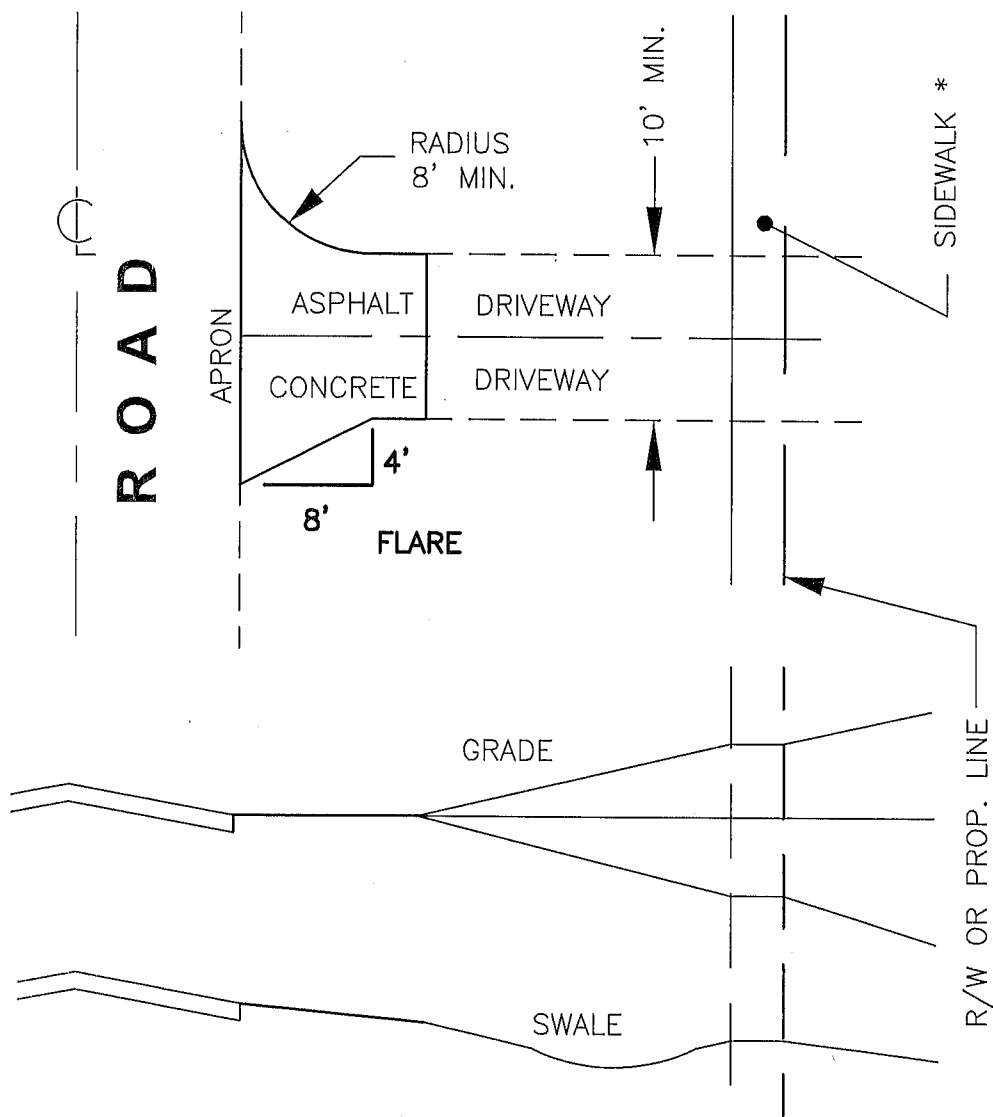

* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR

6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE




DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION

437 ARDICE AVE.
EUSTIS, FLORIDA 32726

S

RESIDENTIAL DRIVEWAY WITH STANDARD
"TYPE F" CURB AND GUTTER

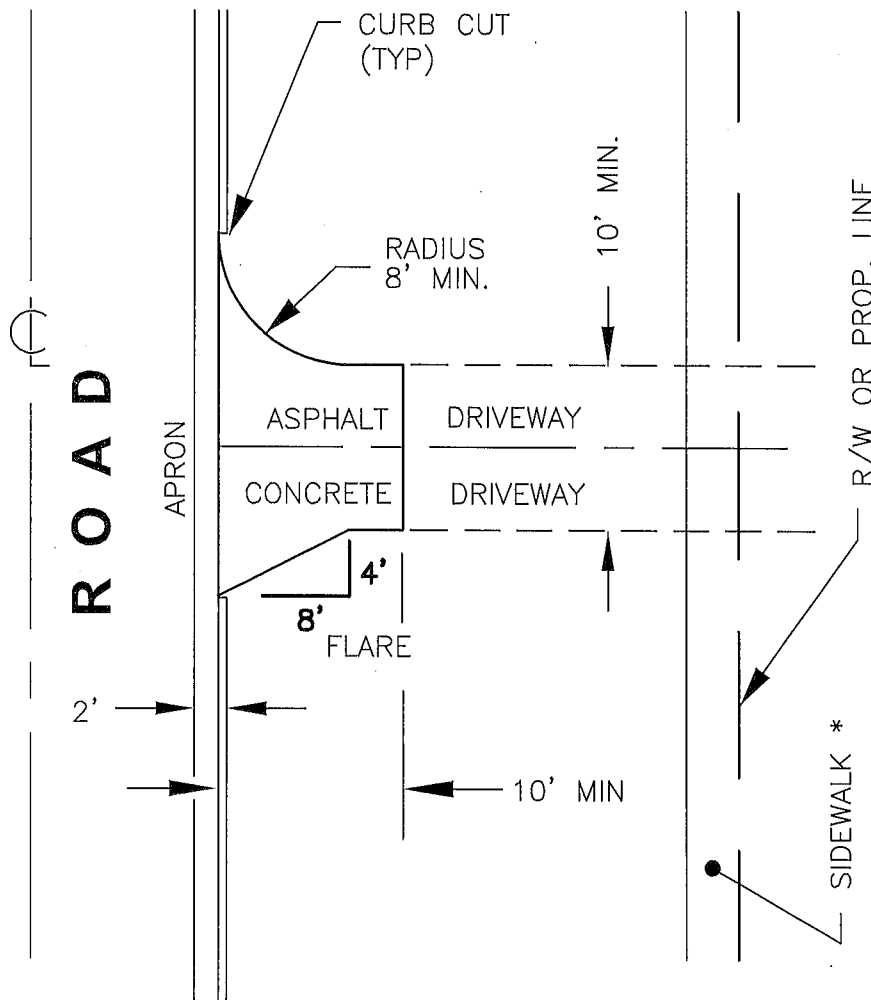

* SIDEWALK (IF REQUIRED) SHALL BE CONSTRUCTED TO MEET FDOT INDEX 310, ADA SPECIFICATIONS SPECIFICATIONS FOR PUBLIC RIGHT-OF-WAYS, AND LAKE COUNTY STANDARDS WITH A MAXIMUM CROSS SLOPE OF 1.5% AND A MAXIMUM RUNNING GRADE SLOPE OF 5%, OFFSET 1' FROM PROPERTY LINE/ RIGHT-OF-WAY LINE.

1" ASPHALT WITH
6" COMPACTED LIMEROCK BASE
& 12" COMPACTED SUBGRADE

OR

6" 3,000 PSI CONCRETE
REINFORCED WITH 10-10x6"x6" MESH
& 6" COMPACTED SUBGRADE